EdWord 3.0

User manual for the Atari ST, STE, TT and Falcon

A word processor for Atari computers with GDOS fonts, tables, charts, pictures, drawings, colour themes, spelling in six languages, a thesaurus, and RTF and PDF export.

The screenshots were taken on a Falcon in 640x400 with 256 colours, under TOS 4 and without GDOS, so only the system font is shown. With GDOS loaded, the document is shown in its real fonts. EdWord works in every resolution from 640 pixels wide, in monochrome too; "Colours and screens" says what each number of colours adds.

Contents

Getting started 4

What you need 4

Installing 4

Starting 4

Language 4

The window 5

The toolbar 5

Zoom 6

Rulers and guides 7

Moving around 7

Three views 8

Colour themes 10

Files 11

New, open and save 11

Import and export 11

Print preview, printing and PDF 13

Auto-save 14

Closing 15

Editing 15

Typing and selecting 15

Undo and redo 15

Cut, copy and paste 15

Find and replace 15

Characters 16

Fonts and sizes 16

Style and colour 17

Paragraphs 18

Alignment and spacing 18

Indents and hanging indents 19

Lists 19

Headings 20

Wrap column 20

Pages 20
Page layout 20
Breaks 21
Headers and footers 21
Tables 22
Inserting a table 22
Working in a table 23
Changing a table 23
Charts 24
Pictures and drawings 25
Pictures 25
Drawings 27
Table of contents 27
Tools 28
Checking spelling 28
Spelling as you type 28
Six languages 29
User dictionaries 30
Thesaurus 30
Document summary 30
Preferences 31
Windows 32
Colours and screens 34
Testing EdWord 34
About EdWord 35
Keys 36
Limits 37

Getting started

What you need

EdWord runs on any Atari ST, STE, Mega ST, TT or Falcon, on clones and in emulators, with at least 1 MB of memory, in a screen mode at least 640 pixels wide: ST medium resolution, ST high resolution or more, in any number of colours. It works under TOS 1 to 4, MultiTOS, MagiC (with its own 3D dialogs, check boxes and radio buttons), XaAES and MyAES. Load a GDOS (SpeedoGDOS, FSMGDOS, NVDI, FontGDOS, AMCGDOS or G+Plus) to have more than the system font; outline fonts give the best results.

Installing

The `EDWORD` folder of the package holds everything EdWord needs; copy it to your Atari as it is:

- `EDWORD.PRG` - the program, for any processor from the 68000 on.
- `EDWORD.RSC` - the menus and dialogs, and `EDWORDDE.RSC`, `EDWORDES.RSC`, `EDWORDIT.RSC`, `EDWORDFR.RSC` and `EDWORDCS.RSC` for the other languages. EdWord needs them beside it.
- `EDWORD.DIC` - the spelling dictionary (British English), and `EDWORD.THS`, the thesaurus (English).
- `MANUALEN.PDF` - this manual.

The other folders of the package hold what you add if you want it:

Folder	What it holds
`CPU\030`, `CPU\030F`, `CPU\040`, `CPU\CF`	a faster `EDWORD.PRG` for a 68030, a 68030 with an FPU, a 68040 or 68060, or a ColdFire (FireBee): copy it over the one in `EDWORD`
`LANG\DE`, `ES`, `IT`, `FR`, `CS`	each language's spelling dictionary and manual, and an `EDWORD.INF` that starts EdWord in that language (copy it only the first time)
`TEST`	`EDWTEST.PRG`, the test program (see "Testing EdWord")

EdWord creates `EDWORD.INF` (your preferences) and `USER.UDC` (your own words) in its folder. A faster version that is started on a processor it cannot run on says so and stops.


Starting

Double-click `EDWORD.PRG`. You can also drop a document on it, or install it as an application for `*.EWR` files. Hold **Control** while it starts to skip the GDOS fonts (safe mode), or **Alternate** to size outline fonts with `vst_point` if your GDOS has trouble with `vst_arbpt`.

Language

EdWord speaks English, German, Spanish, Italian, French and Czech. The first time it starts it uses the language of your TOS; you can change it at any time in **Preferences**. The spelling dictionary is chosen separately (**Preferences** > **More**); the thesaurus is English. Czech needs a Czech system font (with the Czech letters of the Kamenický code page): in Czech, documents use those letters, and dates can be written 27.10.2026.

The window

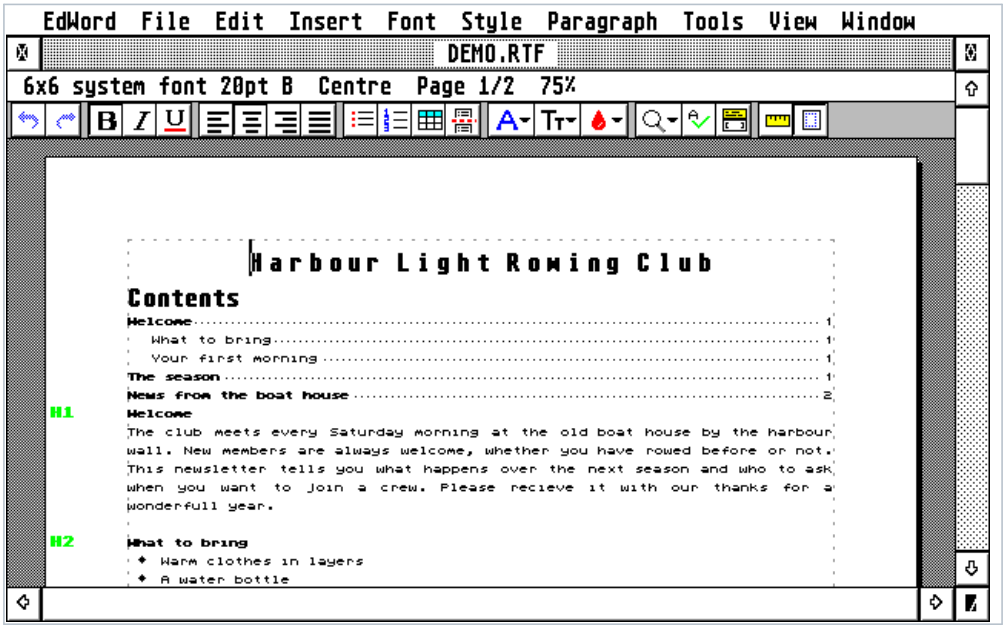

A document window: title, information line, toolbar and the page.


Each document has its own window; up to 32 documents can be open. Under the title the **information line** shows the font, size and style at the cursor, the paragraph's alignment, list and heading, the page number, the zoom and the view.

The toolbar

The toolbar can be shown or hidden for each window with **View** > **Toolbar** (Control+T). Its icons are in colour on screens with 16 colours or more. From left to right:

Icon	Does
Undo, Redo	undo or redo the last change
B I U	bold, italic, underline
Four alignment icons	left, centred, right, justified
List icons	bullet list, numbered list
Table	insert a table
Font, size and colour	pop-up lists (marked with a small arrow)
Magnifier	zoom pop-up
Tick	check spelling
Codes	split view with the formatting codes
Ruler, guides	rulers along the page, dotted margin and column guides


Settings that are on show pressed; icons that cannot be used now are grey.

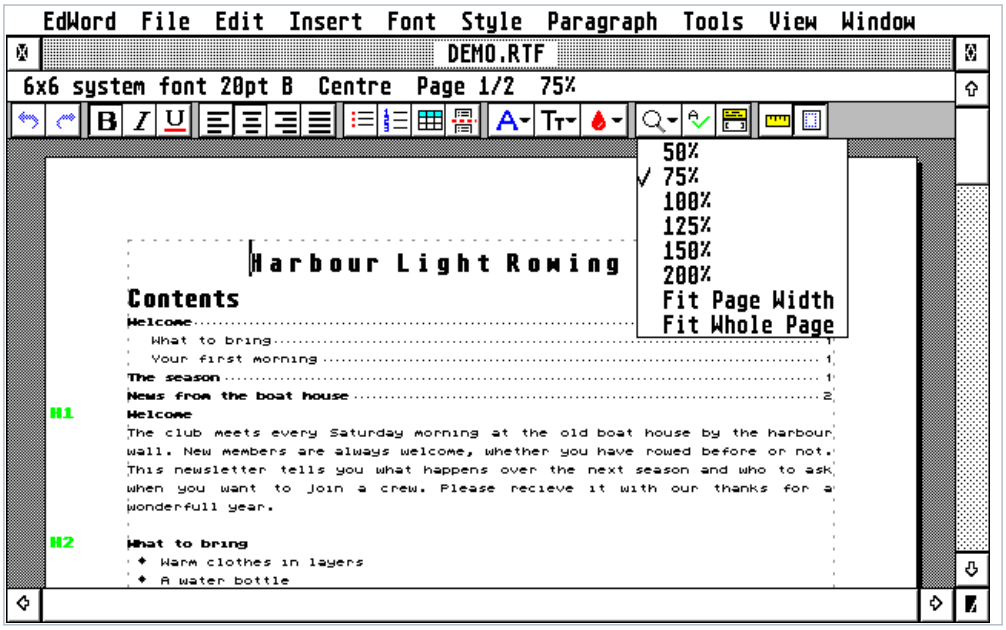


The zoom pop-up on the toolbar.

Zoom

The page can be shown at 50, 75, 100, 125, 150 or 200 per cent: use the magnifier on the toolbar, or **Zoom In** (F8) and **Zoom Out** (F7) in the **View** menu. **Fit Page Width** (Shift+F8) makes the page fill the window's width, and **Fit Whole Page** shows the whole page, its height too (down to 10 per cent in a small window); both follow the window when you change its size.

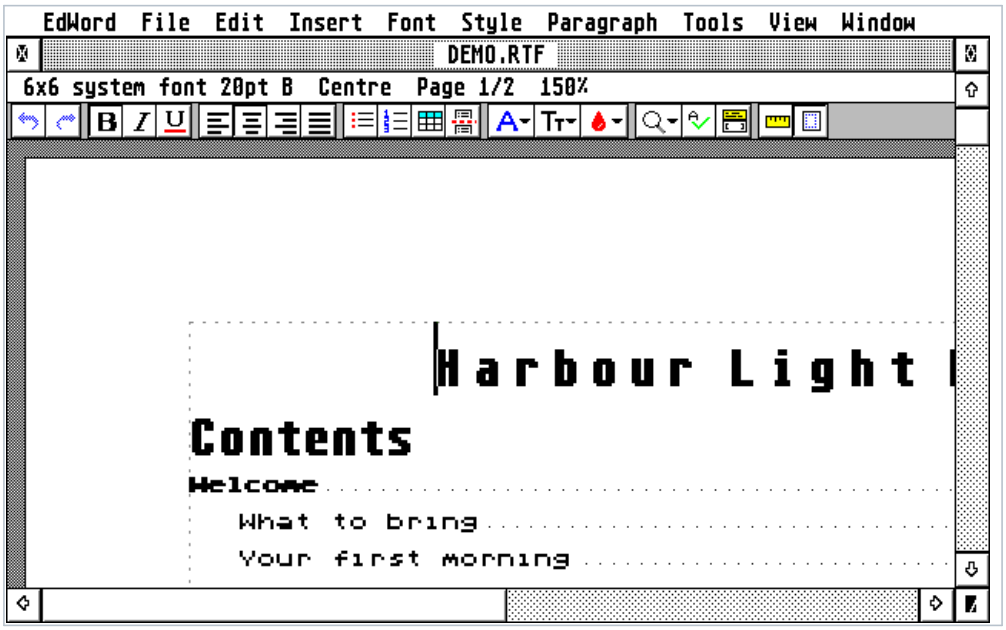


The document at 150 per cent.

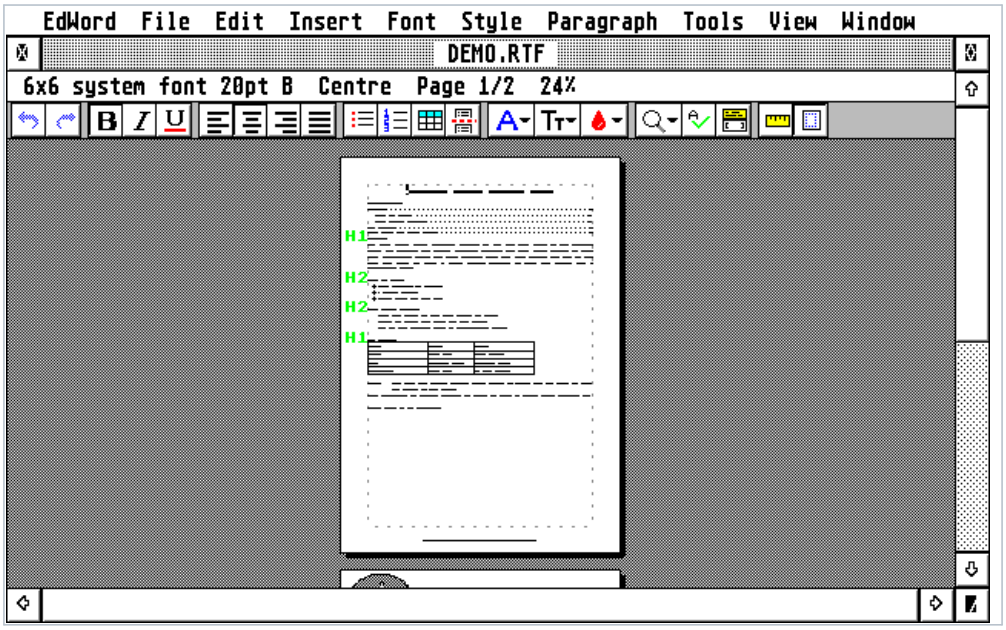

Fit Whole Page.

Rulers and guides

Rulers (Control+Shift+R) shows rulers in centimetres along the top and left of the page view; **Guides** draws the margins and columns as dotted lines that do not print. Both are remembered. Double-click the top ruler for **Indents**, the left one for **Page Layout**.

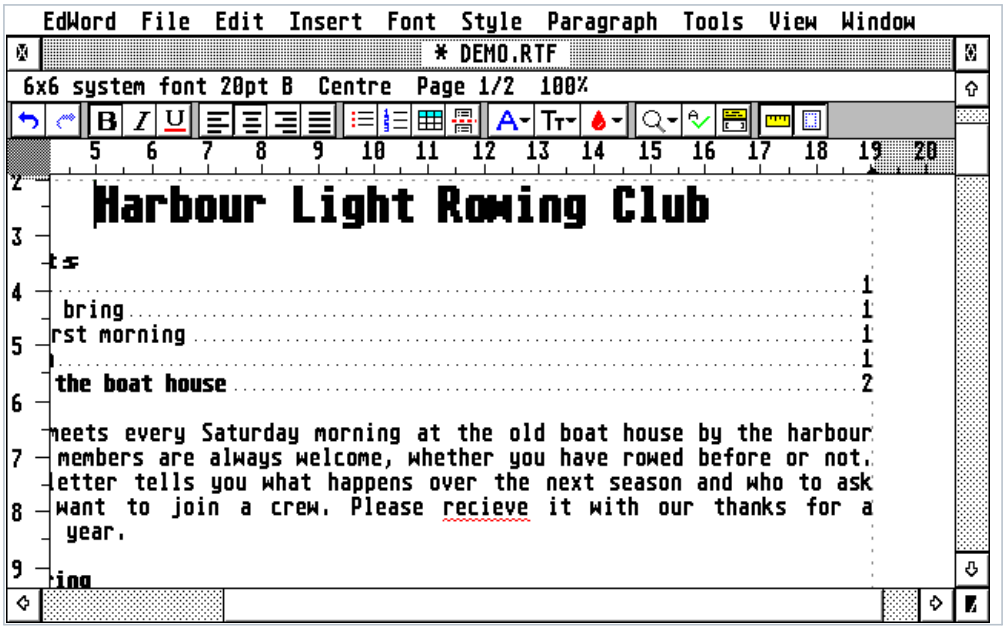


The rulers.

Moving around


The scroll bars, the arrow keys and dragging a selection move through the document; only the part that comes into view is drawn again, so scrolling is quick. **Edit** > **Previous Page** and **Next Page** (Control with the up and down arrows) go a page at a time and **Go to Page** (Control+J) to any page.

Three views


View > **Page View** (F4) shows the formatted pages. **Split View (Codes)** (Control+Y) adds the **formatting codes** of the text below the page; both halves can be edited, and a click moves between them. **Quick Edit** (F6) shows only the codes, in the system font, which is the fastest way to edit long documents. Codes you type are applied when you pause or click back in the page.

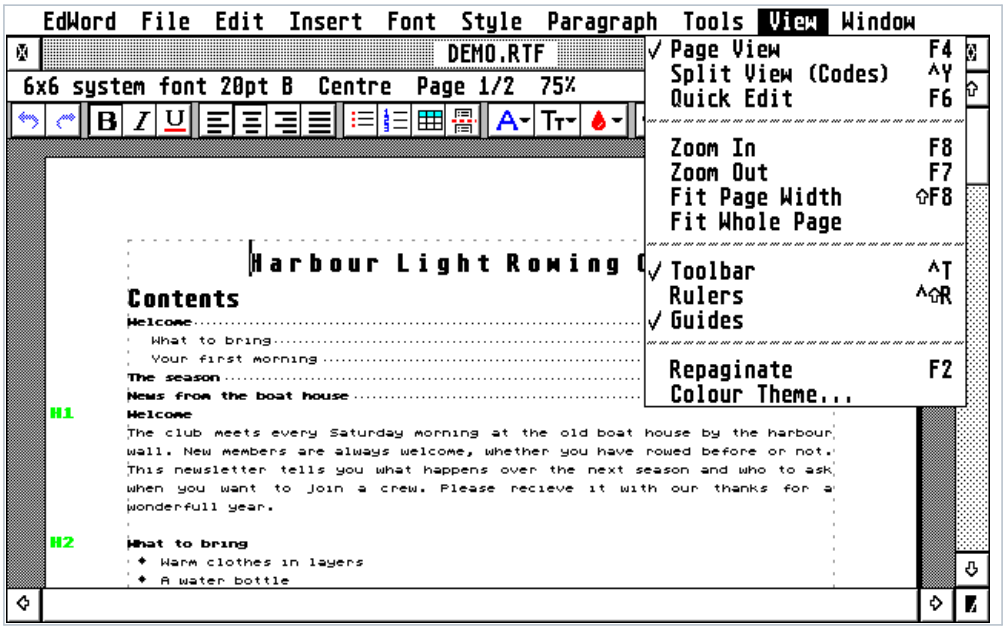

*The **View** menu.*

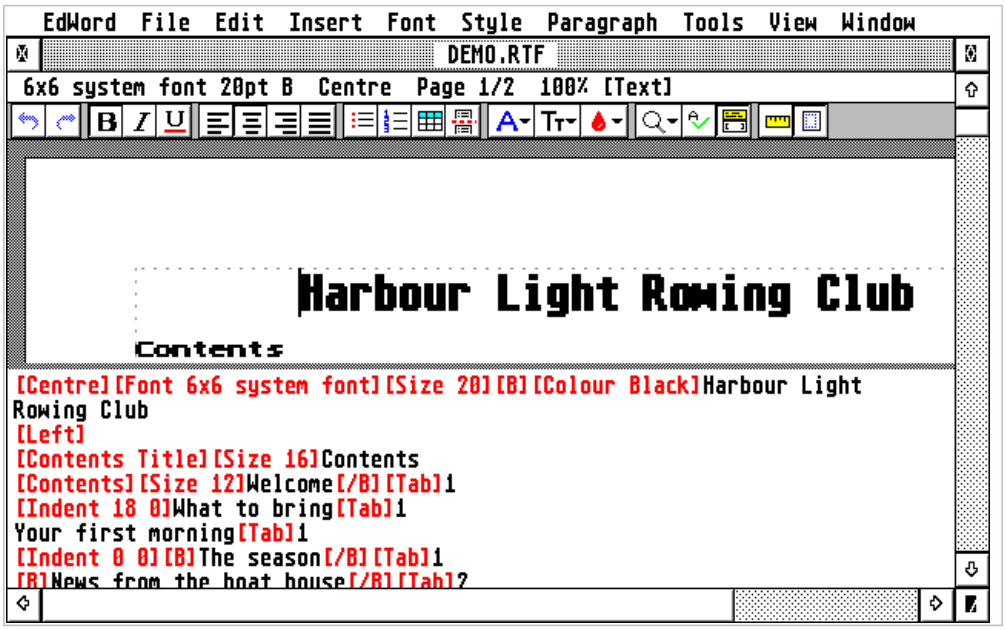

Split view: the page above, its codes below.

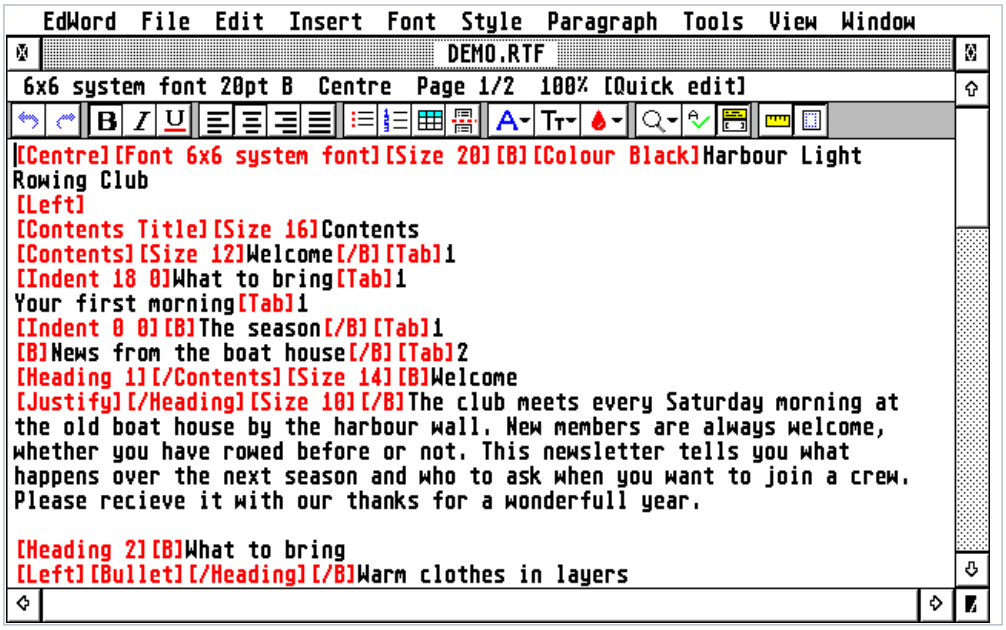

Quick Edit: *the whole window shows the codes.*


The codes are switches, each lasting until the next code of its kind:

Code	Meaning
`[Font name] [Size 12]`	font and point size
`[B] [/B] [I] [/I] [U] [/U]`	bold, italic, underline on and off
`[Colour Red]`	text colour
`[Left] [Centre] [Right] [Justify]`	paragraph alignment
`[Spacing 1] [Spacing 1.5] [Spacing 2]`	line spacing
`[Indent 36 -18]`	left indent and first line, in points
`[Bullet] [Number] [/List]`	lists
`[Heading 1]` to `[Heading 3]`, `[/Heading]`	headings for the table of contents
`[Contents Title] [Contents] [/Contents]`	the generated table of contents
`[Table 120 120 Border] [Row] [Cell] [/Table]`	tables, column widths in points
`[Tab] [Page] [Column]`	tab, page break, column break
`[[`	a real "["

A bracket that is not a known code stays ordinary text.


Colour themes

On screens with **256 colours or more**, **View > Colour Theme** colours EdWord's own parts of the window: the toolbars, the information line, the rulers, the codes and the desk around the pages (in the print preview too). Choose one of the themes, such as Classic, Lagoon or Terracotta, or set each of its six colours from 0 to 255; the picture in the dialog shows the result as you choose. **Apply** shows it on the windows at once and **Cancel** puts the colours back. Atari is EdWord's usual look. The dialogs, menus and window frames belong to the system and keep its colours, and the pages are not changed.

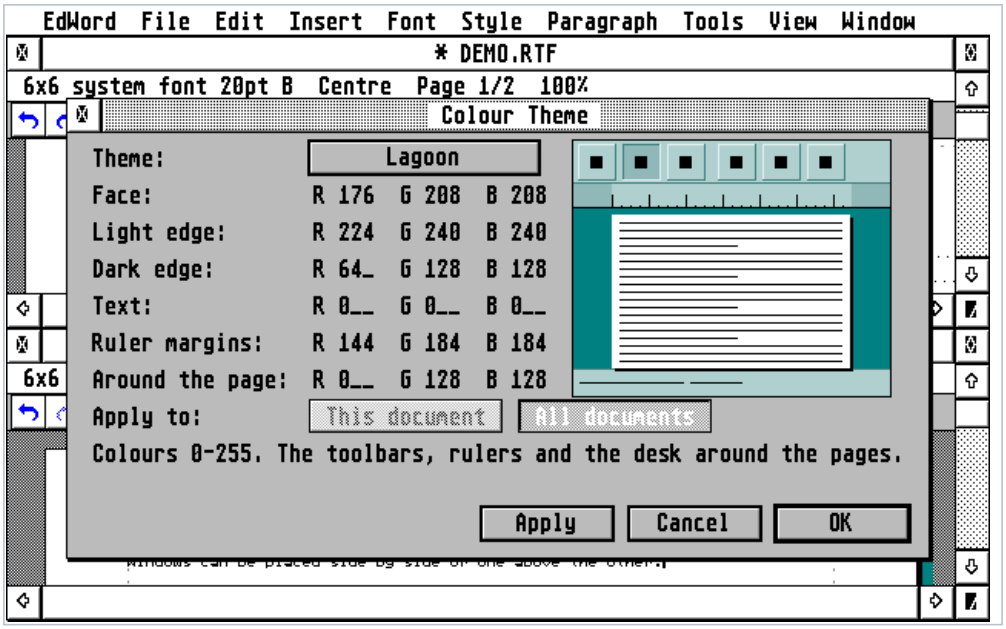


The **Colour Theme** *dialog.*

On screens with **high or true colour** (15, 16, 24 or 32 bits), **Apply to** gives the theme to **This document** only, the window that was on top, or to **All documents**, the windows without one of their own. On screens with a palette (up to 256 colours) one theme is for all windows, and these buttons are grey. The theme for all is saved in `EDWORD.INF`.

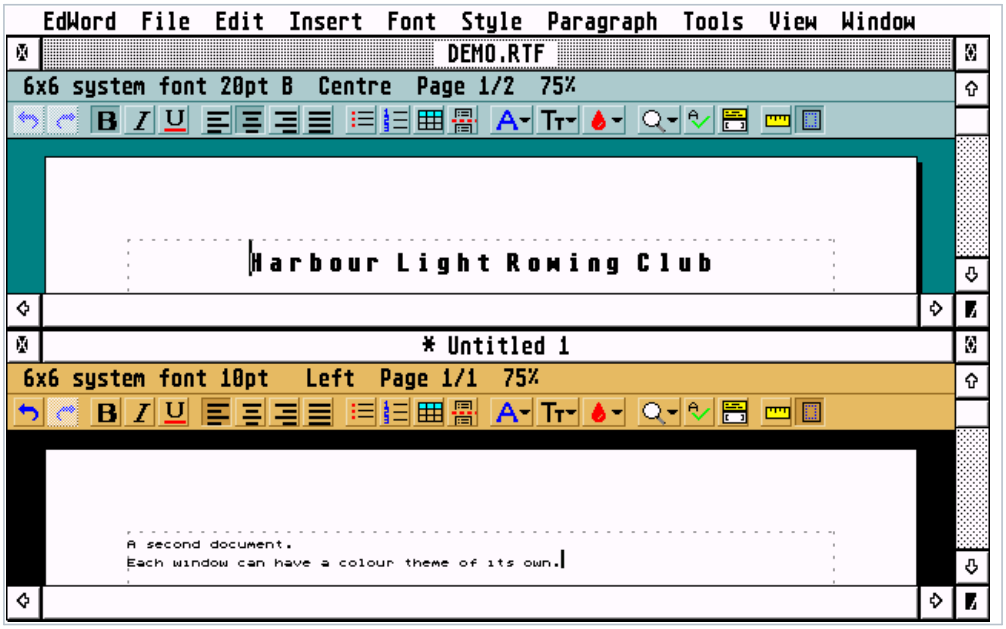

Two documents, each with a colour theme of its own (Lagoon and Squash), on a high-colour screen.

Files

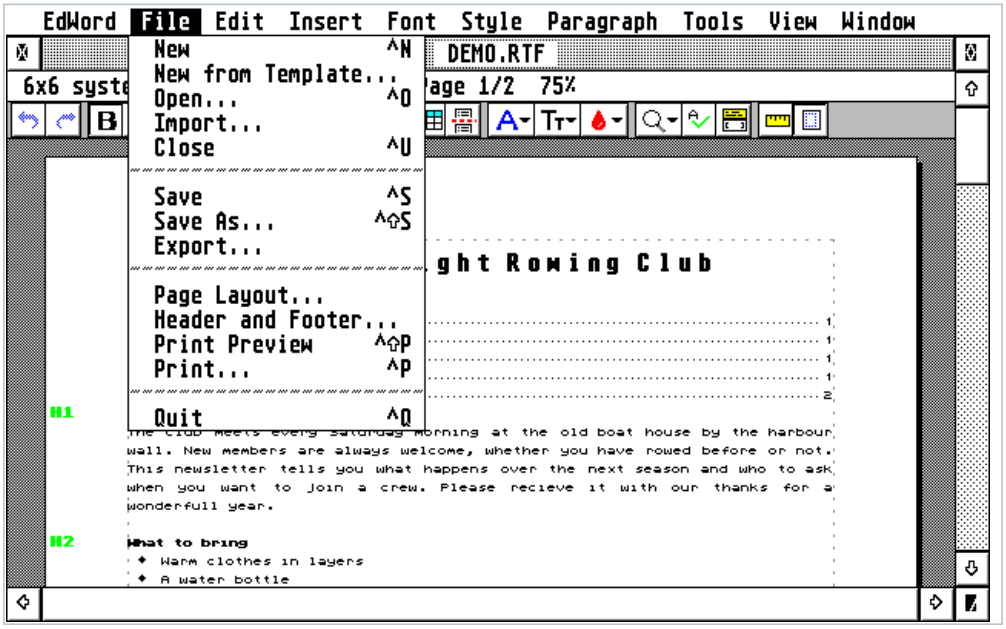

The **File** *menu.*

New, open and save


New (Control+N) opens an empty document. **Save** (Control+S) and **Save As** (Control+Shift+S) write an **EdWord document** (`.EWR`). It keeps everything: fonts, styles, colours, paragraph formats, lists, tables, charts, columns, page formats, headers and footers, pictures and drawings.

An EdWord document is RTF inside, with EdWord's extras in groups that other readers skip and a number for the version of the format. So an older EdWord opens a document from a newer one (leaving out only what it does not know), a newer EdWord opens every older document, and other word processors can read an `.EWR` file as RTF.

Open (Control+O) shows EdWord documents; it reads any document EdWord knows, recognising its format by its contents: EdWord, RTF, plain text, Markdown, 1st Word Plus and Protext. A document that is not an EdWord document opens as a new one, so saving it asks for a name for the `.EWR` file.

Import and export


Import and **Export** each open a window that stays open while you work. Choose the format and its options, then press the window's button to choose the file. Options that do not apply to the chosen format are grey.

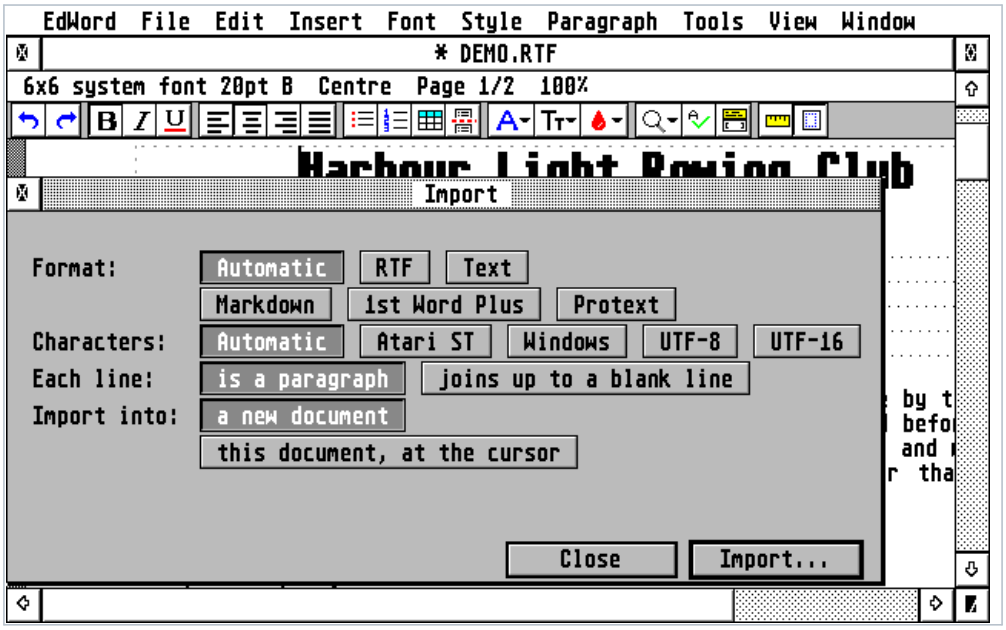

The **Import** *window.*

Import reads **Automatic** (the format is recognised), RTF, Text, Markdown, 1st Word Plus or Protext. For plain text you choose the characters (Atari ST, Windows or UTF-8, or automatic) and whether each line is a paragraph or lines join up to a blank line. The file opens in a new window, or goes into the current document at the cursor.


Export writes a copy of the document you used last (the window names it) as RTF, Text, Markdown, 1st Word Plus, Protext or PDF; the document keeps its own name. Text has a choice of line ends and characters, PDF of resolution.

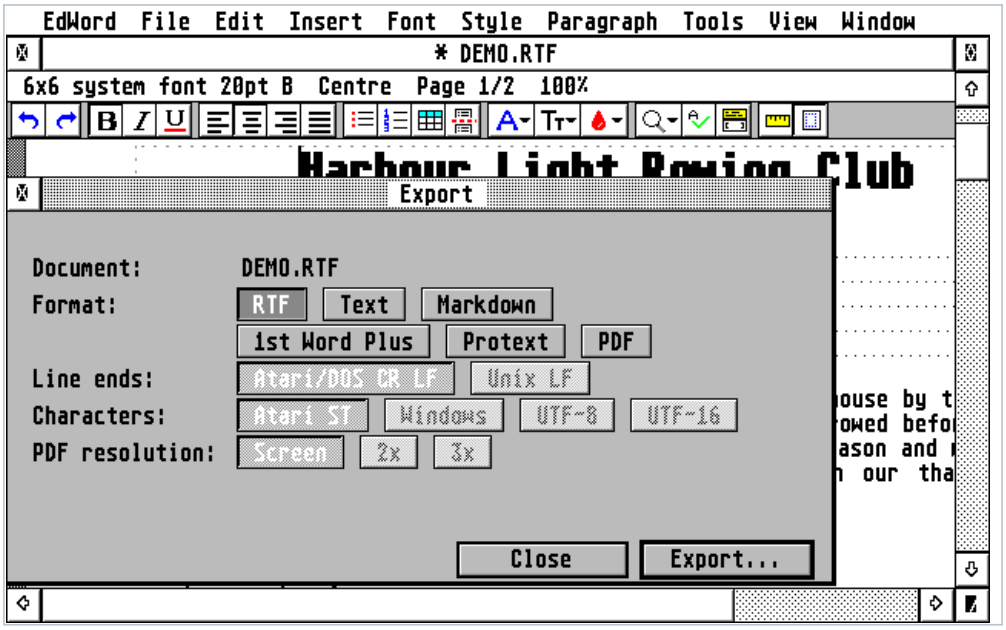

The **Export** *window.*

Format	What is kept
RTF	standard RTF for other word processors (Word, LibreOffice, TextEdit): text, styles, colours, paragraphs, lists, tables, columns, page formats, headers and footers; pictures as PNG pictures in the text, beside the paragraph they were next to. Drawings and charts are left out
Text	the words; line ends and characters as you choose
Markdown (`.md`)	headings, bold and italic, lists, quotes, code blocks, tables, rules and links
1st Word Plus (`.DOC`)	bold, italic and underline, the ruler (width and justification), headers, footers, page breaks
Protext (`.PRO`)	bold, italic and underline, justified and centred lines, the left margin, line spacing, headers and footers with the page number, page breaks
PDF	everything, as printed


When **Open** finds a plain text file, it asks how to read it. EdWord recognises Atari/DOS (CR LF), Unix (LF) and Mac (CR) line ends and Atari ST, Windows and UTF-8 characters. Choose **joins up to a blank line** for text where single line breaks only wrap lines and blank lines separate paragraphs.

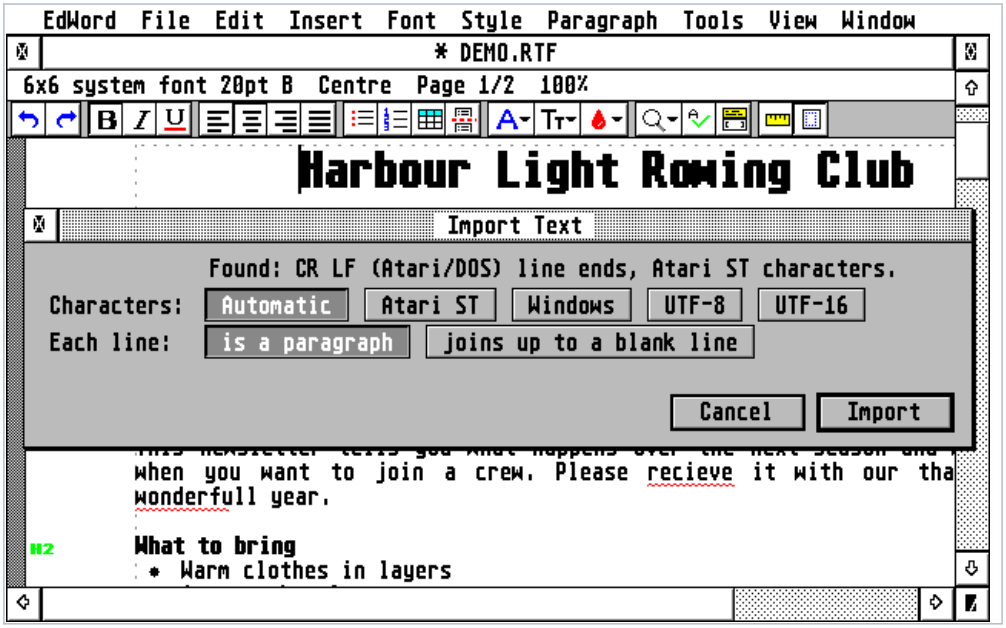

Reading a text file.

Print preview, printing and PDF


Print Preview (Control+Shift+P) shows each page as it will print, with its header and footer. Change page with the arrow buttons or the cursor keys; click the page or use 100% to zoom in. The preview follows your editing, and its buttons print the document or export it as a PDF.

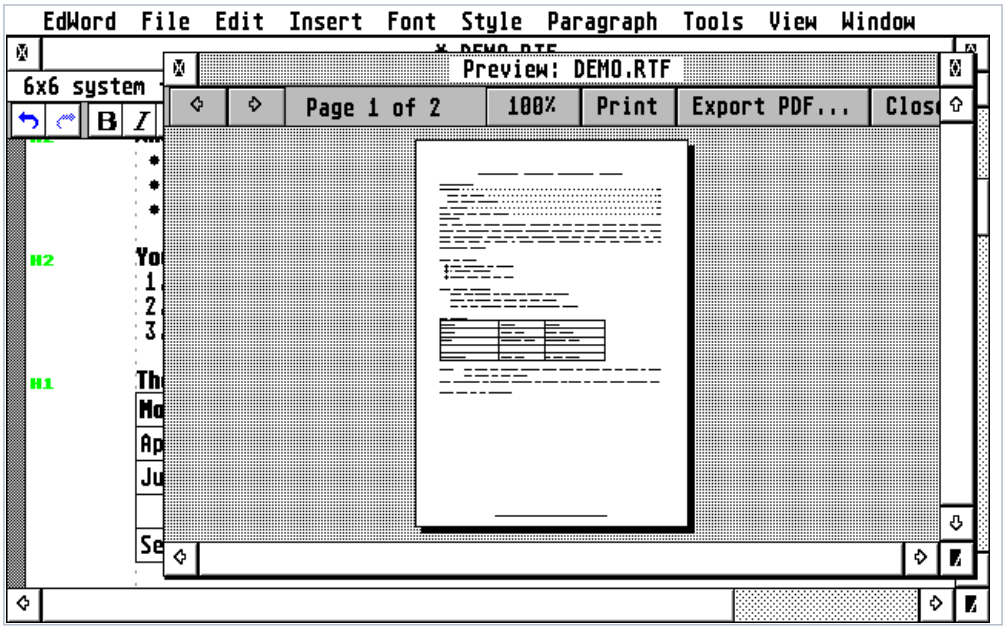

The print preview.

Print (Control+P) asks for the pages and the number of copies and prints through the GDOS printer driver (device 21), at the printer's own resolution, in colour when the driver has 8 colours or more.

PDF export writes the document as a PDF file that any computer can print. Each page is drawn in memory at the resolution set in **Preferences** and stored as an image, so no fonts are needed in the PDF; pictures keep their colours. A gauge shows how far it has got. Gauges also come up when opening, importing, saving or exporting takes more than a moment, and while a picture or a dictionary loads.

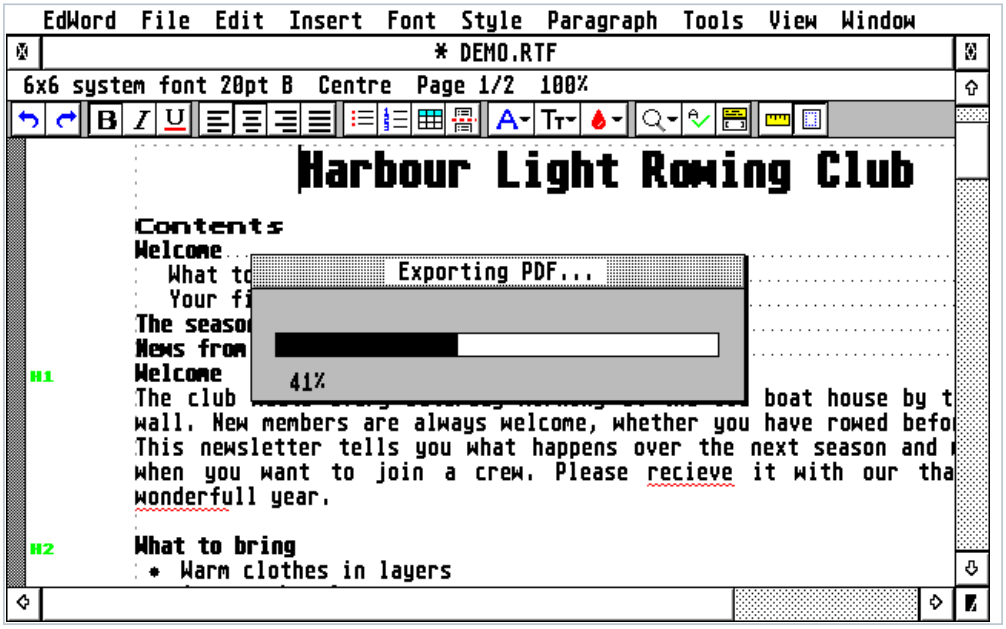

Exporting a PDF.


Auto-save

In **Preferences** you can have EdWord save every few minutes, either to a backup copy (`NAME.ASV` beside the document) or to the document itself.

Closing

Close (Control+U) closes the window, **Quit** (Control+Q) leaves EdWord. You are asked before unsaved changes are lost.

Editing

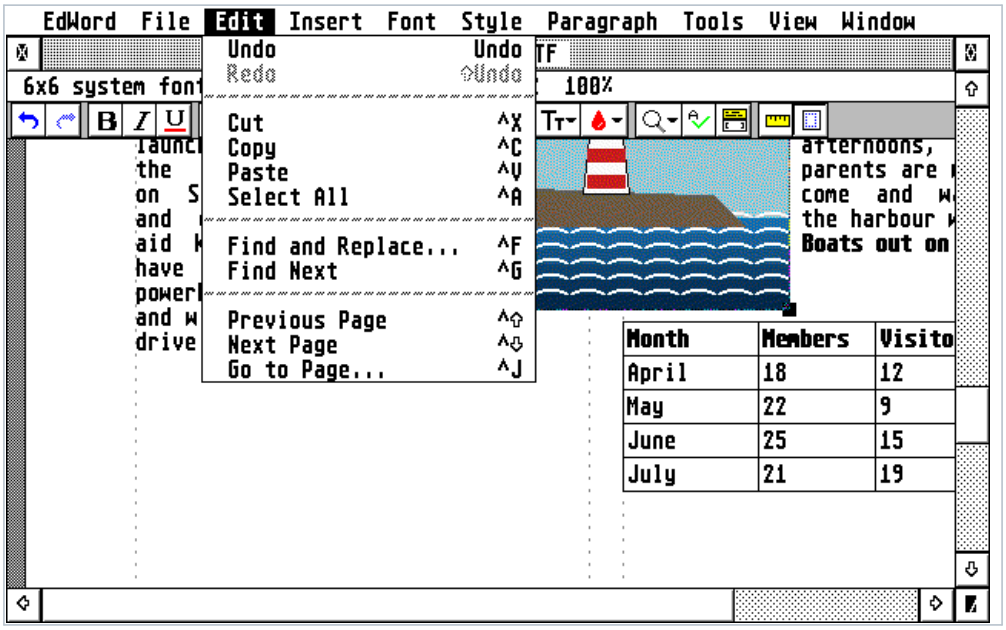

*The **Edit** menu.*

Typing and selecting

Type as in any word processor; Return ends a paragraph. Move with the cursor keys, Clr/Home for the start of a line and Shift+Clr/Home for its end. Drag with the mouse or hold Shift with a cursor key or a click to select; double-click selects a word.

Undo and redo


EdWord remembers your last 100 changes. **Undo** (the **Undo** key) takes back the last change, **Redo** (Shift+Undo) does it again. Typing a word counts as one change.

Cut, copy and paste

Cut (Control+X), **Copy** (Control+C) and **Paste** (Control+V) use the GEM clipboard, so you can exchange text with other programs: EdWord writes `SCRAP.RTF` with the formatting and `SCRAP.TXT` as plain text. A selected picture or drawing is copied as `SCRAP.IMG`, and a `SCRAP.IMG` newer than the text on the clipboard is pasted as a picture. **Select All** (Control+A) selects the whole document.

Find and replace

Find and Replace (Control+F) opens a window that stays open while you work. Type the text to find and, if you like, its replacement. **Match case**, **Whole words** and **Backwards** narrow the search. **Find Next** selects the next match, **Replace** replaces the selected match and finds the next, **Replace All** replaces every match in one step (one Undo takes them all back). **Find Next** (Control+G or F3) searches again without the window.

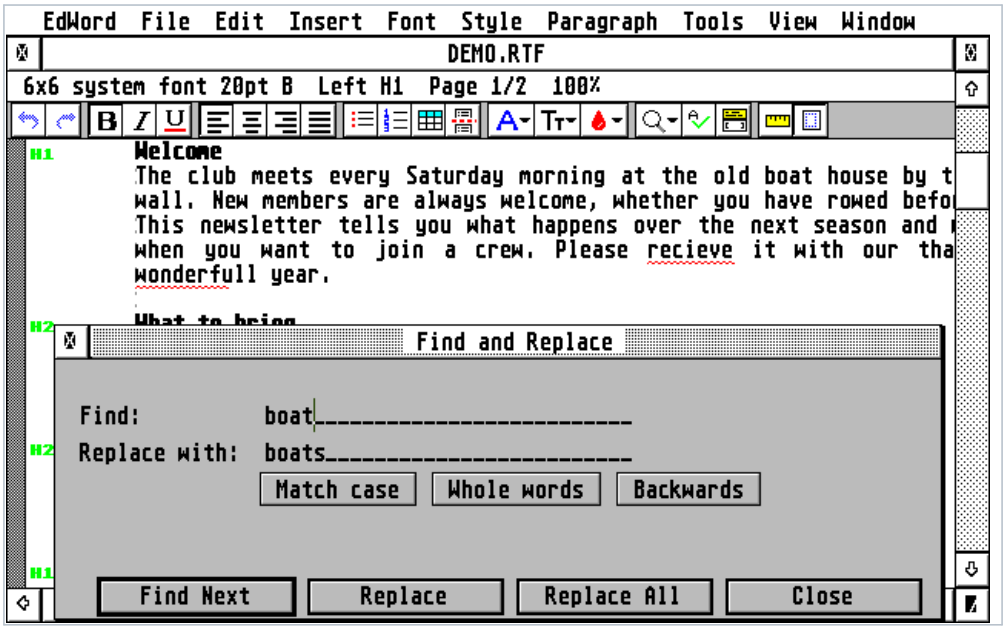


The **Find and Replace** *window.*


Characters

Fonts and sizes

The **Font** menu has the fonts and the common point sizes together. **Other Size** sets any size from 4 to 120 points. If there are more fonts than fit in the menu, **More Fonts** opens the font selector.

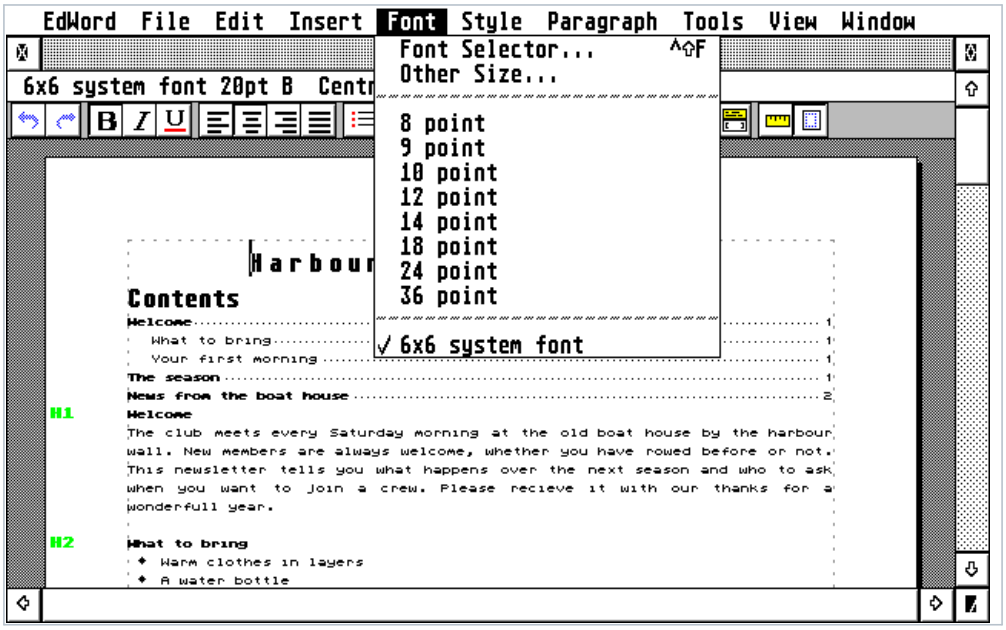


The **Font** *menu, with sizes and fonts.*

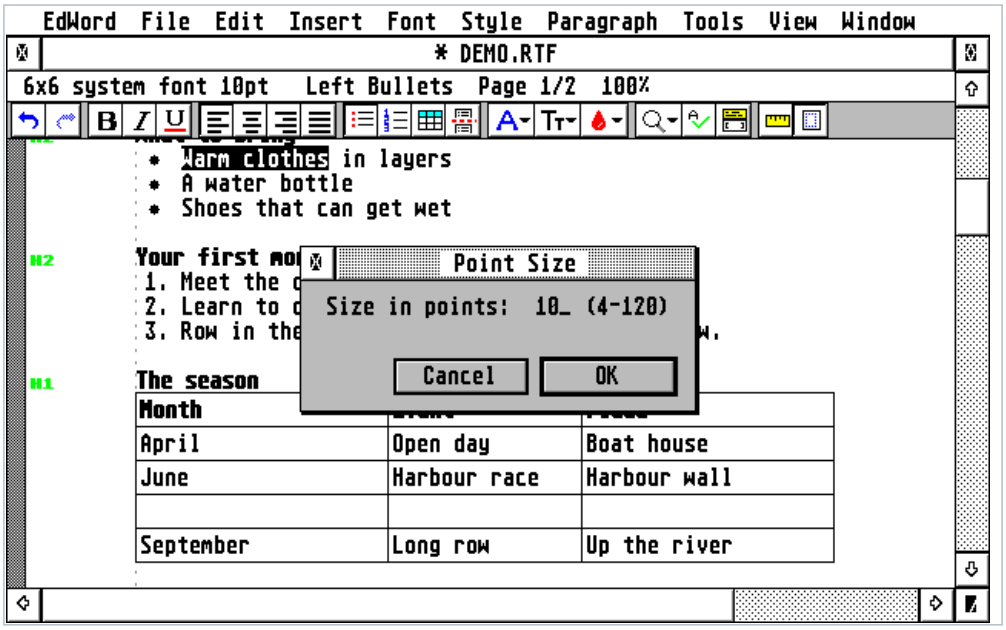

Any point size.


Font Selector (Control+Shift+F) opens the **font selector**, a window with lists of fonts and sizes, style boxes and a sample. It follows the cursor in the document; **Apply** (or Return, or a double-click) applies the choice. If an external font selector is running and named in the `FONTSELECT` environment variable, EdWord uses that instead.

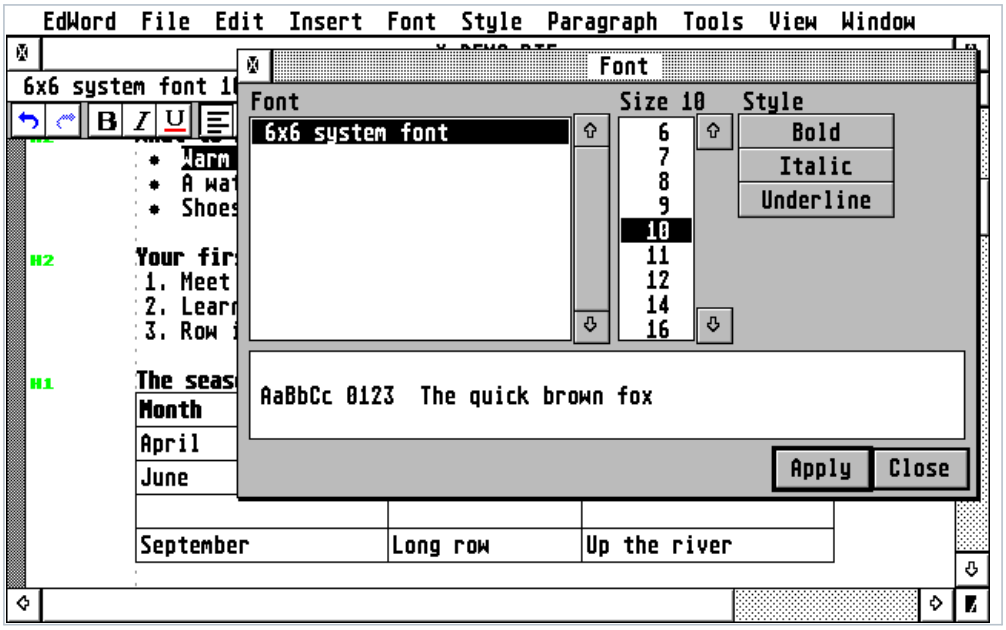

The font selector.

Style and colour


The **Style** menu sets **Plain Text**, **Bold** (Control+B), **Italic** (Control+I) and **Underline** (Control+Shift+U), and the text colour. Colours are kept in EdWord documents, RTF and PDF; on screen all eight show with 16 colours or more (fewer with 4, none in monochrome). They can be switched off in **Preferences**.

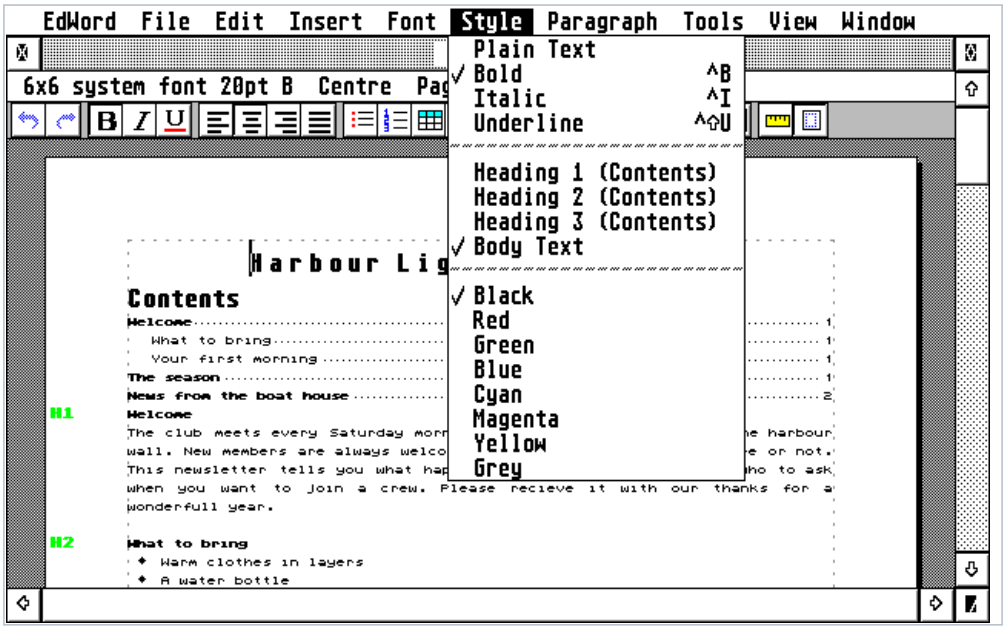

*The **Style** menu.*

With text selected, a style applies to the selection; otherwise it applies to what you type next.

Paragraphs

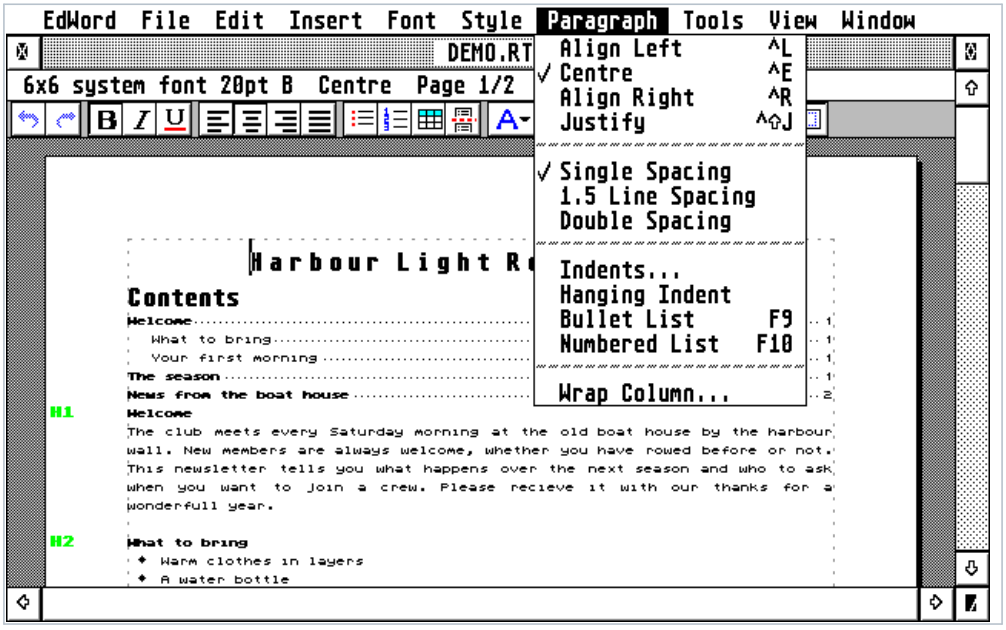

*The **Paragraph** menu.*


Paragraph settings apply to the paragraph with the cursor, or to every paragraph in the selection.

Alignment and spacing

Align Left (Control+L), **Centre** (Control+E), **Align Right** (Control+R) and **Justify** (Control+Shift+J). Line spacing can be **Single Spacing**, **1.5 Line Spacing** or **Double Spacing**.

Indents and hanging indents


Indents sets the left indent and the first line in millimetres. A negative first line makes a **hanging indent**: the first line starts further left than the rest, as for numbered points or a glossary. **Hanging Indent** switches a hanging indent on and off. In the first line of a paragraph with a hanging indent, a tab moves on to the indent, so the text after it lines up with the lines below.

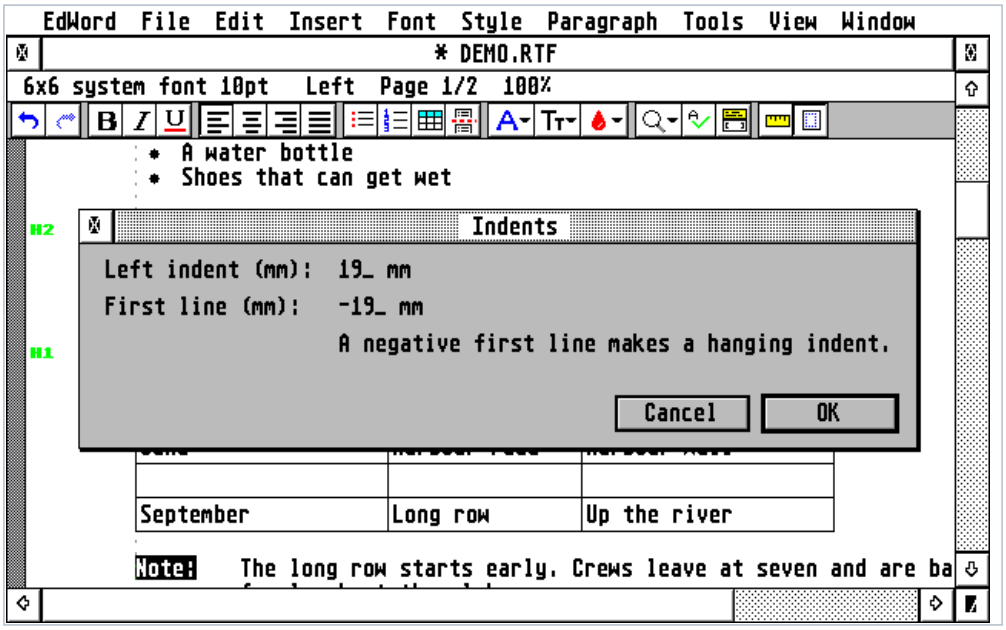

Indents; the paragraph below uses a hanging indent.

Lists

Bullet List (F9) and **Numbered List** (F10) turn paragraphs into a list, with the toolbar icons doing the same. Each paragraph is one item. Numbers count on through the list and start again after any other paragraph. Choose the same command again to end the list.

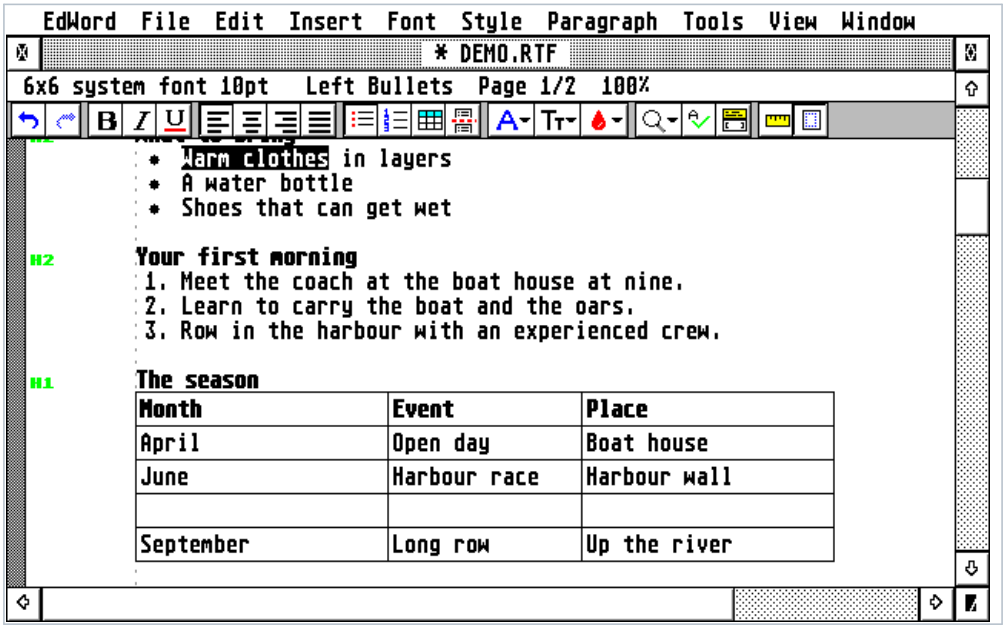

A bullet list and a numbered list.


Headings

Heading 1 (Contents), **Heading 2 (Contents)** and **Heading 3 (Contents)** mark a paragraph as a heading for the table of contents; **Body Text** makes it ordinary text again. Headings are marked H1-H3 in the margin while you edit; the marks do not print.

Wrap column

Wrap Column also breaks lines after a number of characters, for text that must keep a fixed width. Text export then ends each line with a line break.


Pages

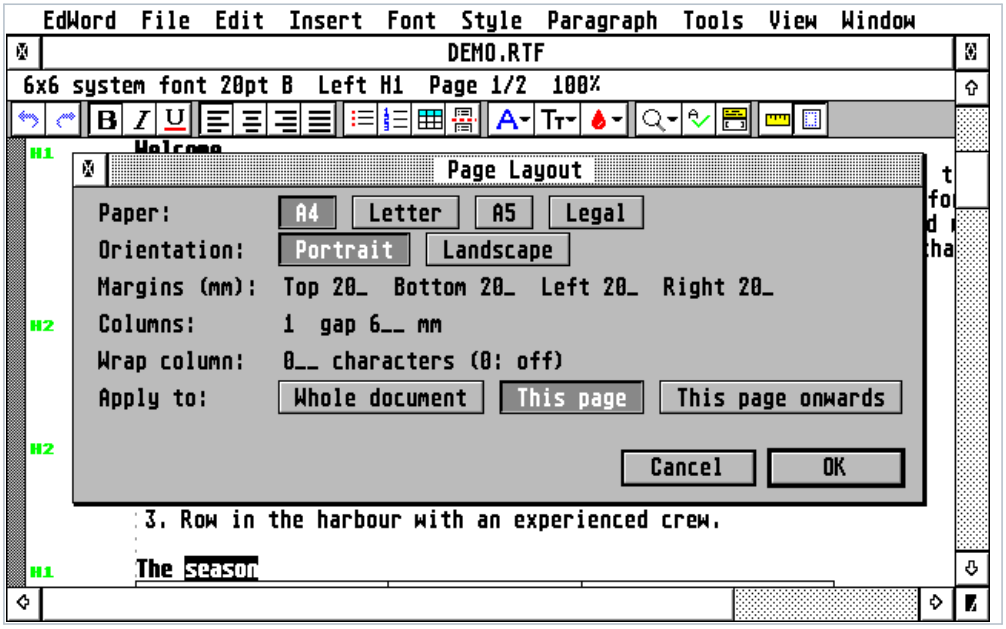

The **Page Layout** *dialog.*

Page layout

Page Layout in the **File** menu sets the paper (A4, Letter, A5, Legal), the orientation, the margins, the number of text columns (1 to 4) and the gap between them. **Apply to** decides where the settings go: **Whole document**, **This page** (the page with the cursor), or **This page onwards**. So one document can have a single-column first page and two columns after it, or a page with wider margins.

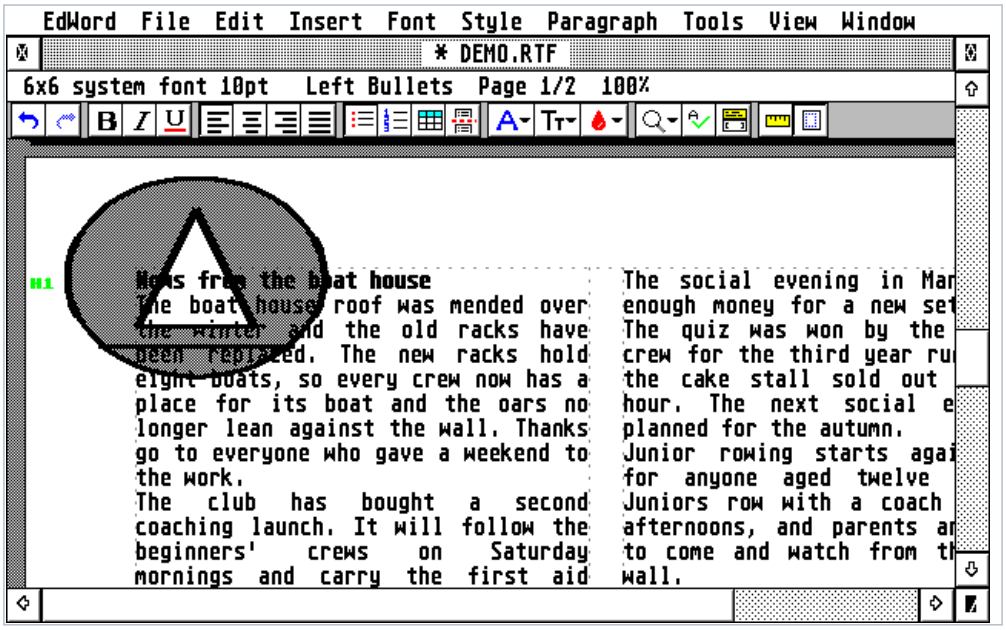


A page with two columns.

Breaks

Insert > **Page Break** (Control+Return) starts a new page; **Column Break** (Control+Shift+Return) moves on to the next column. **View** > **Repaginate** (F2) lays out the pages again.


Headers and footers

Header and Footer gives each page a header and a footer line, left, centred or right, at the size you choose. The fields `{page}`, `{pages}`, `{date}`, `{time}` and `{file}` are filled in on each page. They can be left off the first page. **Insert** > **Page Numbers** puts page numbers in the header or footer in one step.

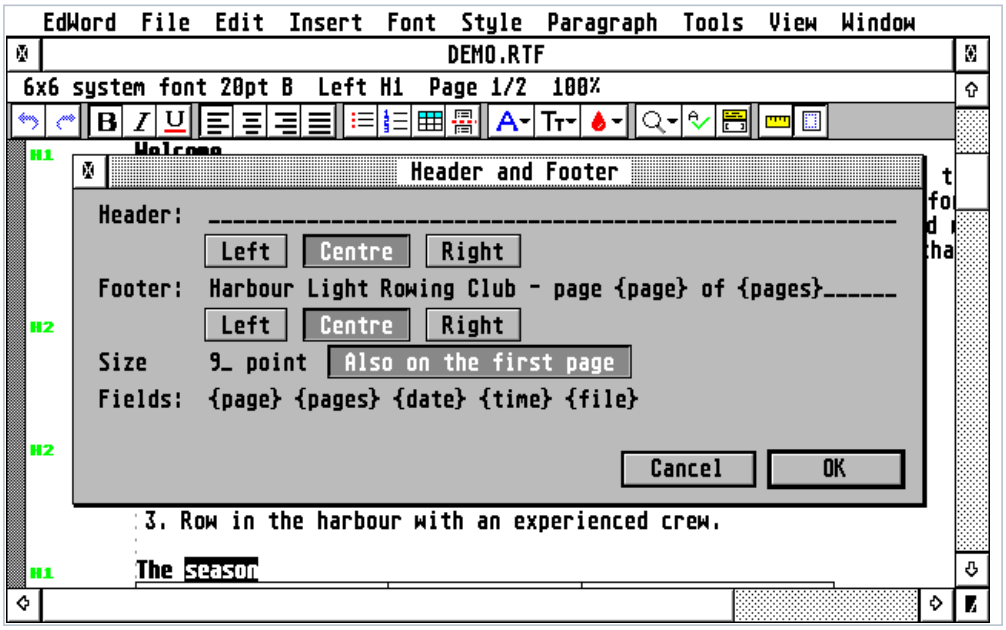

Header and footer.


Tables

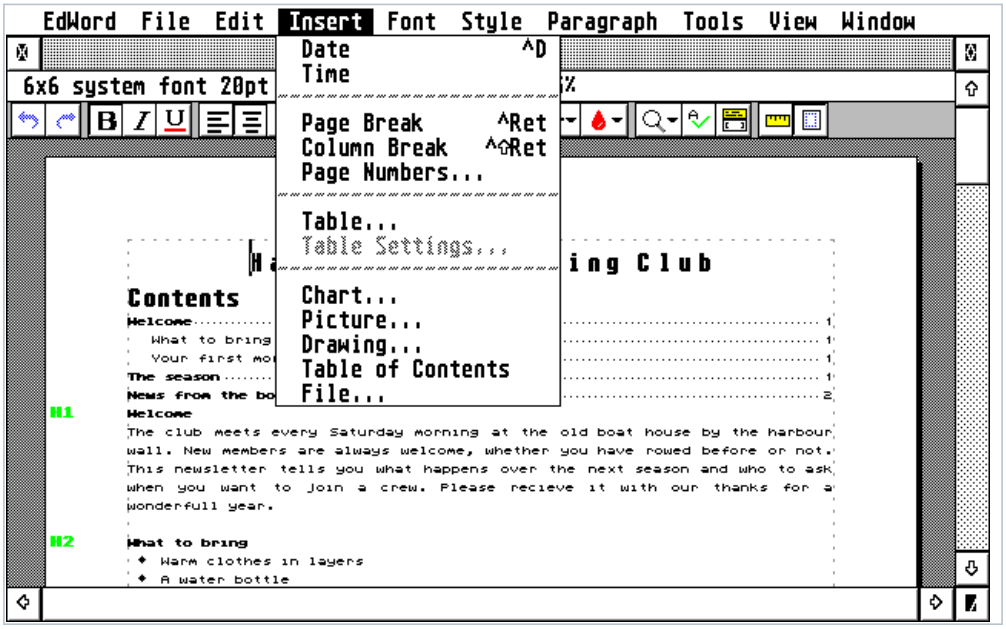


The **Insert** *menu.*

Inserting a table

Insert > **Table** asks for the number of rows and columns and whether to draw grid lines. The table fills the text width, with columns of equal width.

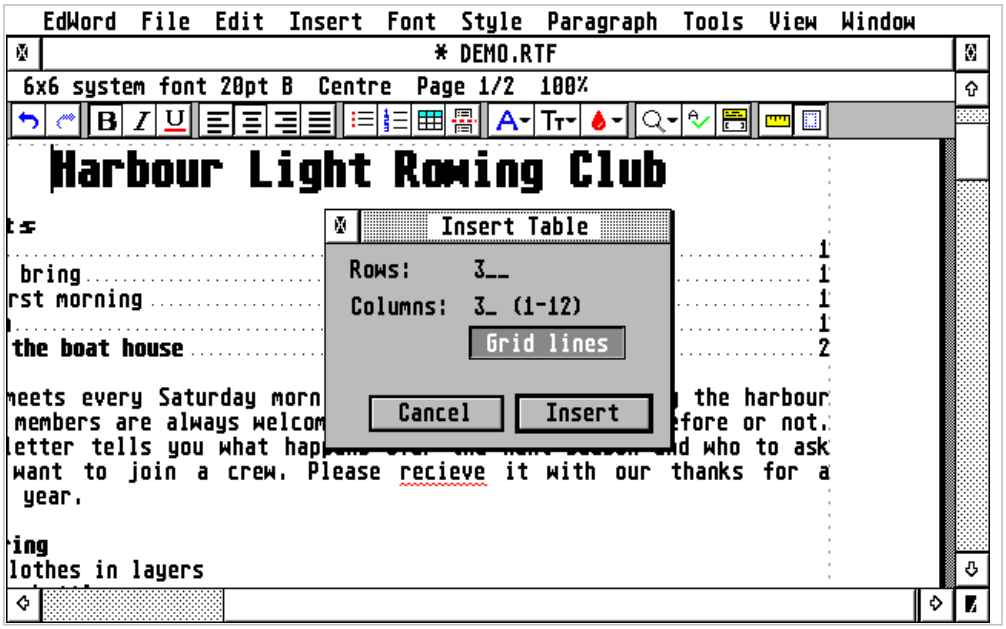


Inserting a table.

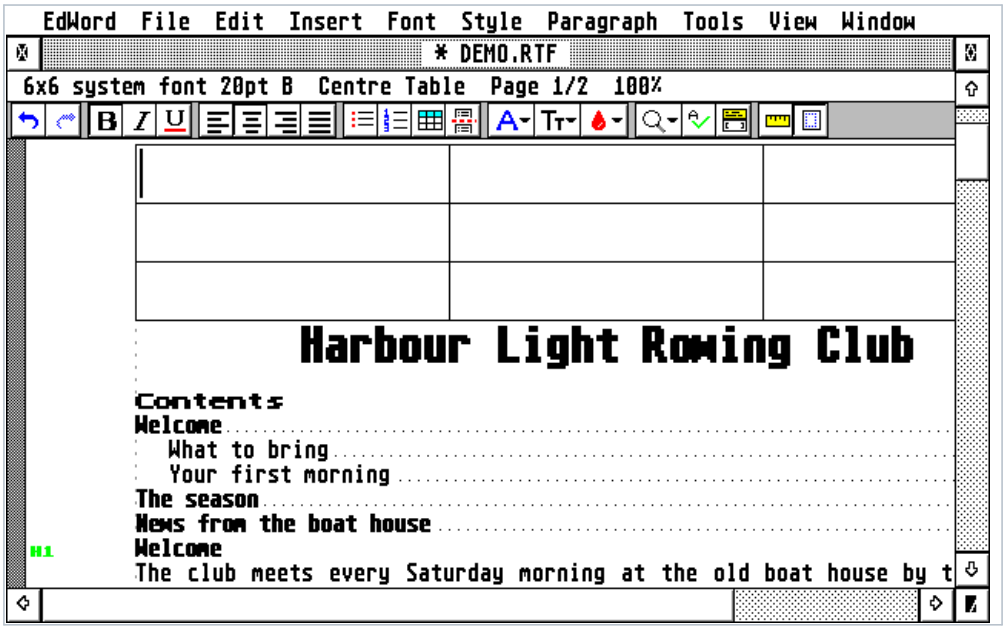

The new table.

Working in a table

Type in a cell as in a paragraph; text wraps inside the cell and the row grows. **Tab** moves to the next cell and Shift+Tab to the previous one; Tab in the last cell adds a row. Return moves to the next cell, and from the last cell out of the table. A table without grid lines shows dotted lines on screen that do not print.

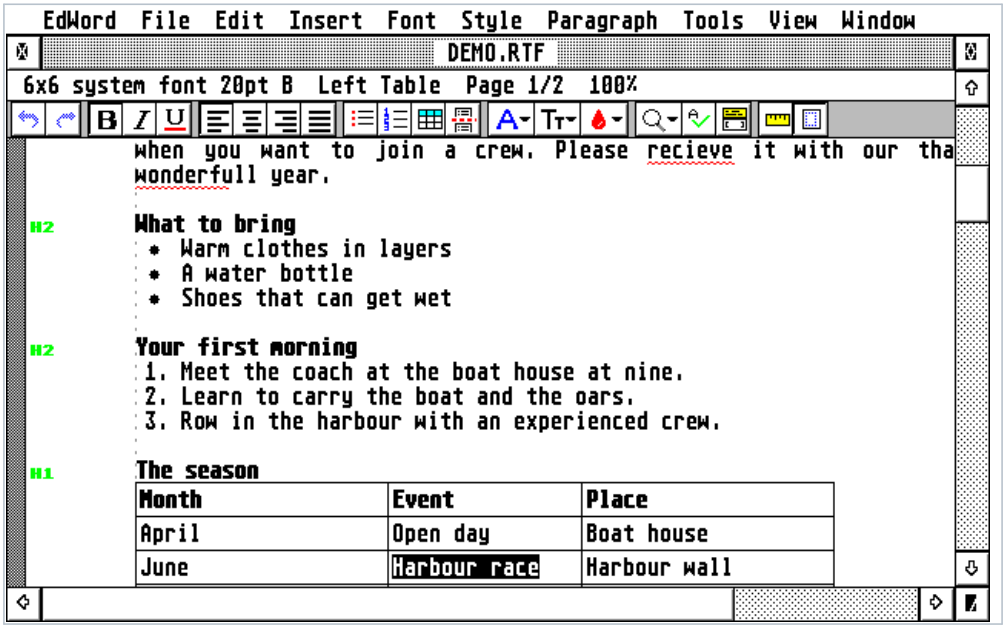

A table with grid lines.

Changing a table

With the cursor in a table, **Table Settings** sets the number of rows and columns, each column's width in millimetres and the grid lines; its buttons also insert or delete the row or column at the cursor, or delete the table. A table can have up to 12 columns.


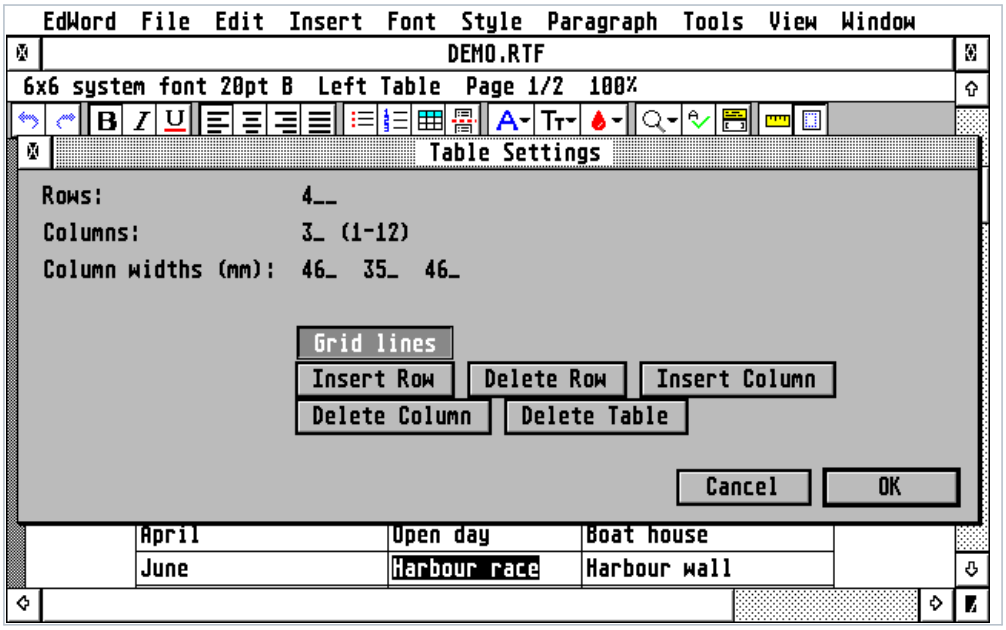


Table Settings.


Charts

A table of numbers can have a **chart**: a pie, a bar chart, a 3D pie or 3D bars, above, below, left or right of the table. Put the cursor in the table and choose **Insert** > **Chart**; a menu offers the kind of chart and its place. Click the chart later for the same menu, or choose **No chart** to remove it.

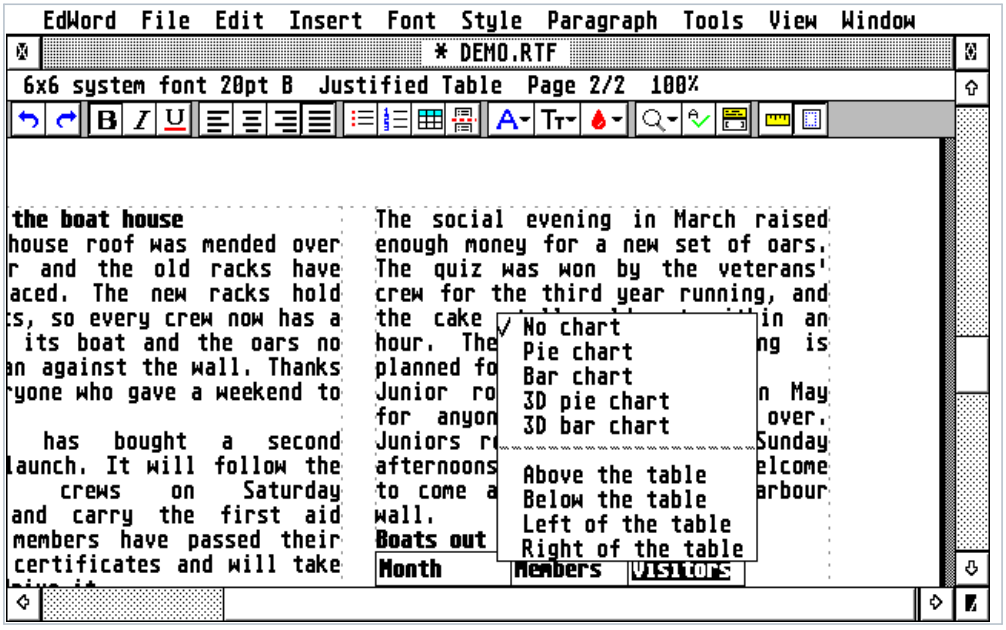

The chart menu.

The rows are the categories and the columns of numbers the series. A first row of words (or years) names the series and a first column of words names the categories. The chart follows the numbers as you type, prints, and goes into the PDF; on screen it is in colour with 16 colours or more, in patterns otherwise.

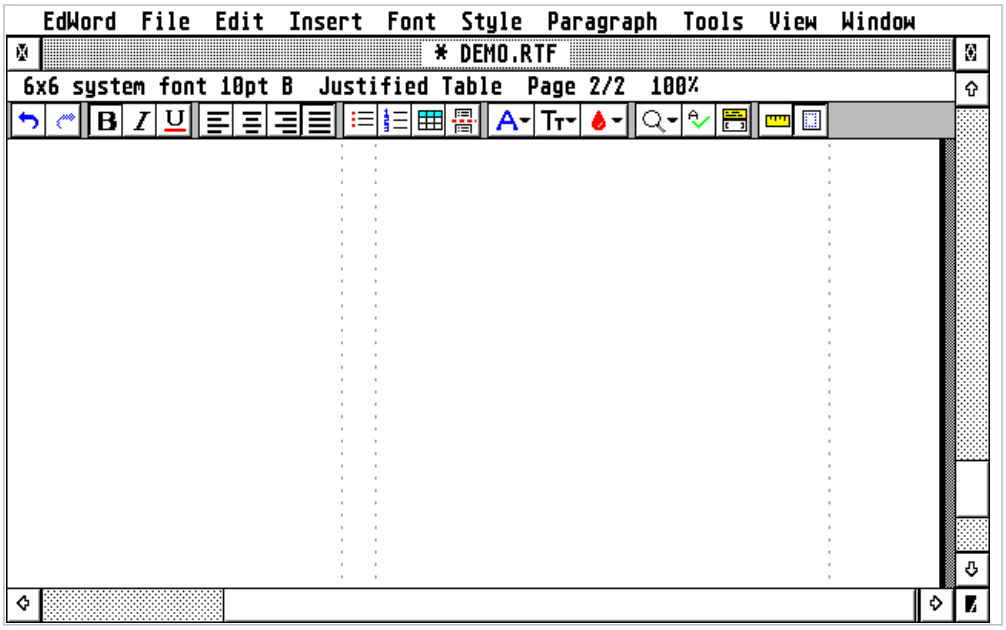


A bar chart below its table.

Pictures and drawings


Pictures

Insert > **Picture** places a picture on the page with the cursor. EdWord reads GEM IMG (monochrome, colour, XIMG and true colour), PNG (every kind; transparent parts become white) and IFF ILBM (including HAM and 24-bit). On screens with high or true colour the picture shows in its own colours; with 4, 16 or 256 colours it is dithered to the screen's colours (the more, the closer), and in monochrome to black and white with a dither that keeps its shades. It prints the same way, and keeps its colours in EdWord documents and in a colour PDF.

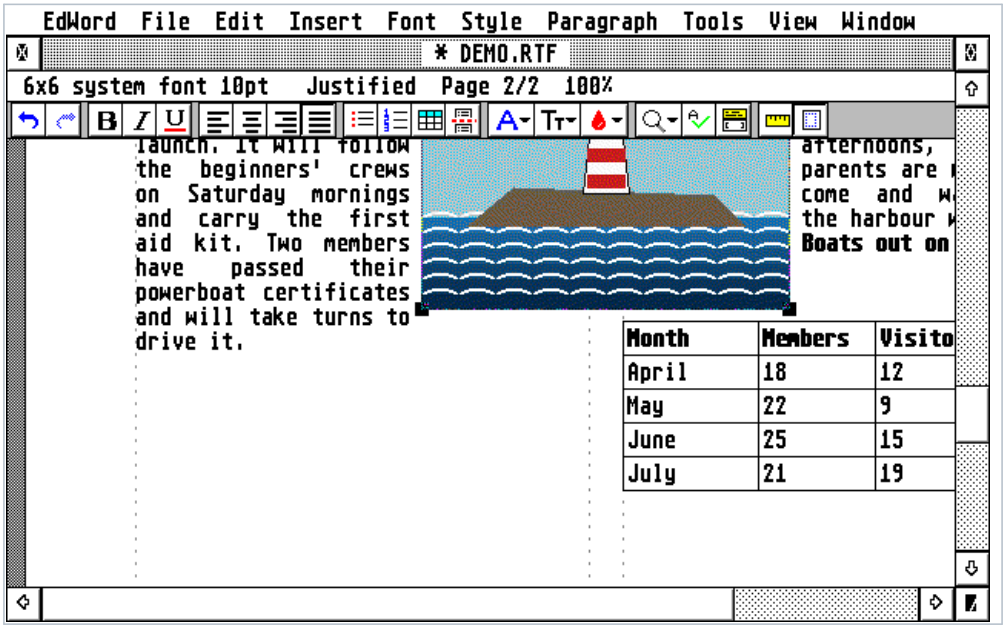


A colour picture on a 256-colour screen, with the text flowing around it.

Click a picture or drawing to select it: handles appear at its corners. **Drag** it to move it (also to another page) and **drag a handle** to resize it; pictures keep their shape unless you hold Shift. The cursor keys move a selected object a little (with Shift, a point at a time), Delete removes it and Esc lets it go.

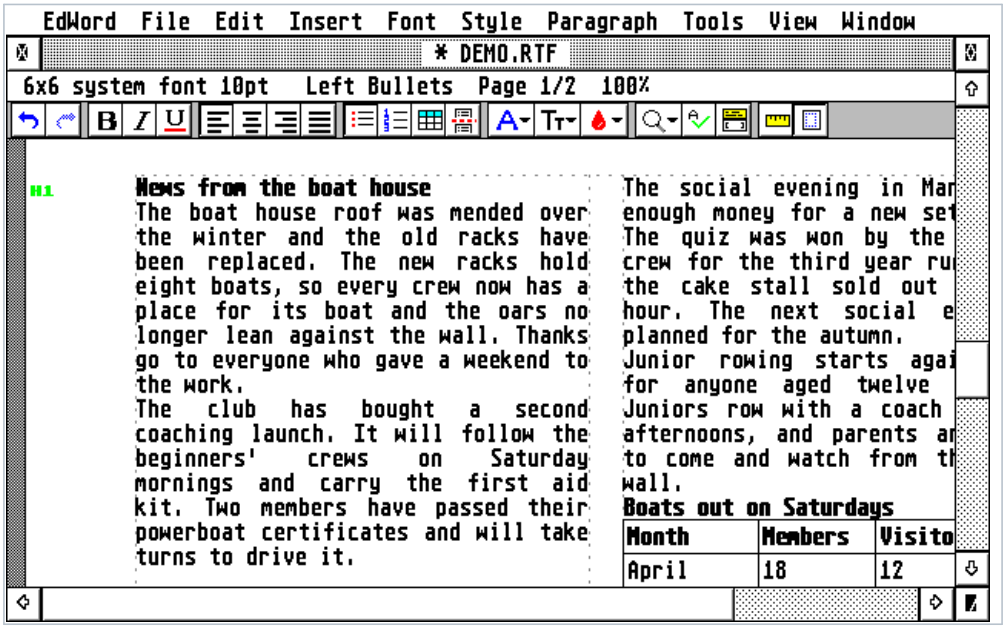

A selected drawing.


Double-click a picture, or press Return, for its settings: position and size in millimetres, page, a frame, and how the text flows: **None** (the object lies over the text), **Around the box**, or, for drawings, **Around the shapes**, where the text follows the outline of the shapes.

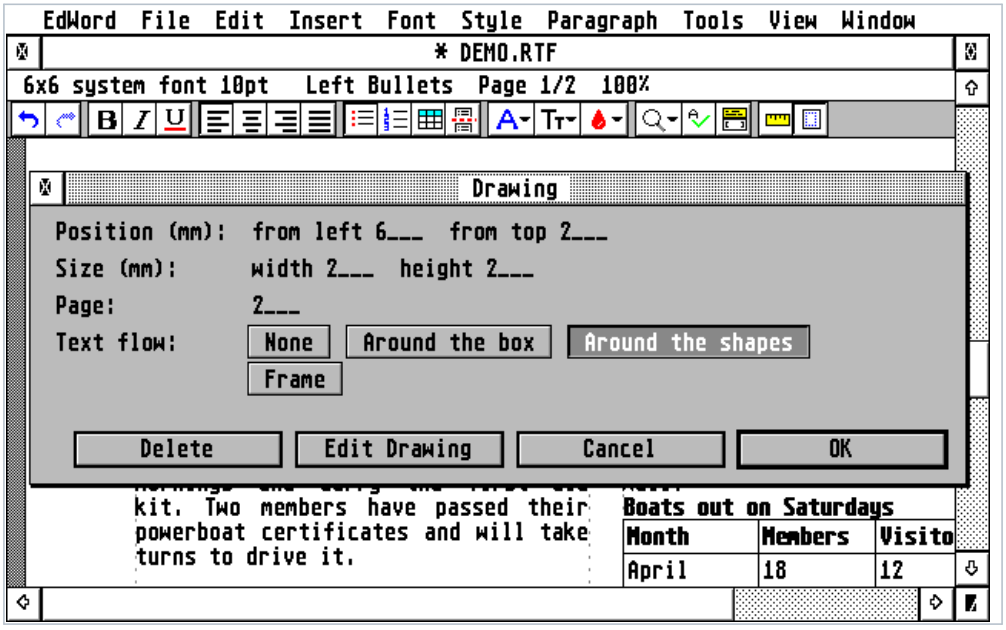

Settings of a drawing.

Drawings

Insert > **Drawing** places an empty drawing and opens the **drawing window**. Choose a shape - box, rounded box, ellipse, line, triangle or freehand - and drag on the canvas to draw it. **Select** selects a shape: drag it to move it or drag its corner handle to change its size; Tab steps through the shapes and the cursor keys move the selected one. **Fill** (none, white, grey or solid), **Line** (line width 0 to 5) and the colour apply to the selected shape and to new ones. **To Front** brings a shape in front of the others and **Delete** removes it. A drawing holds up to 16 shapes. Every change shows at once in the document; **Done** closes the window. Double-click a drawing to edit it again.

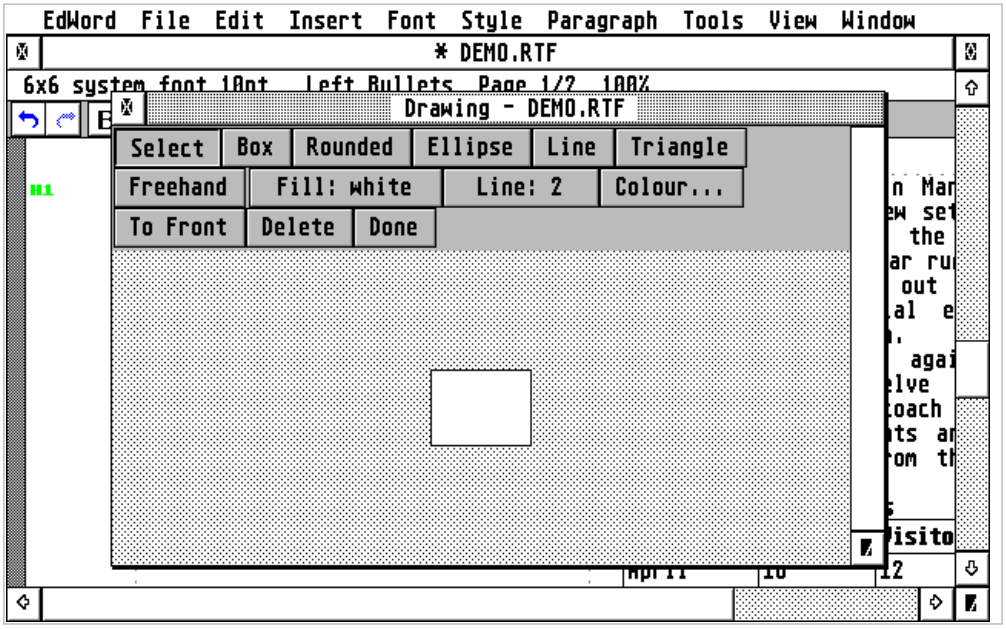


The drawing window.

Table of contents

Mark the headings with **Paragraph** > **Heading 1 (Contents)** to **Heading 3 (Contents)**, put the cursor where the contents should go and choose **Insert** > **Table of Contents**. EdWord lists the headings, indented by level, with dot leaders and page numbers. Choose **Table of Contents** again whenever the document has changed to bring the list up to date; the title can be edited and is kept.


Tools

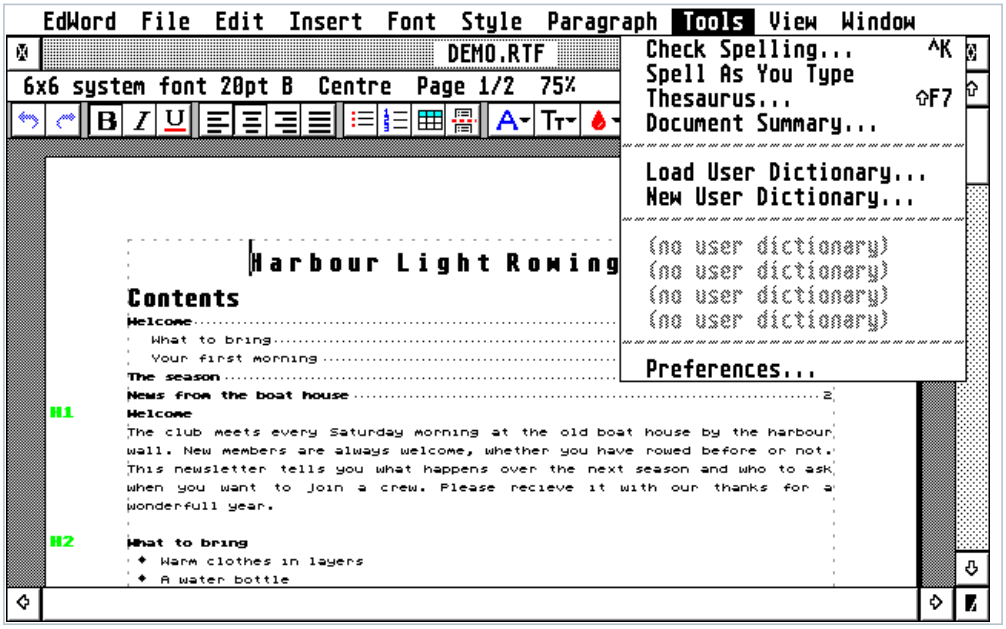

The **Tools** *menu.*

Checking spelling


Check Spelling (Control+K) checks the document from the cursor in a window that stays open. For each unknown word you can type a correction or pick a suggestion, **Ignore** it, **Ignore All** for this session, or **Add** it to your user dictionary. At the end of the document the check goes on from the start, up to where it began; the window then says the check is finished, and **Stop** closes it.

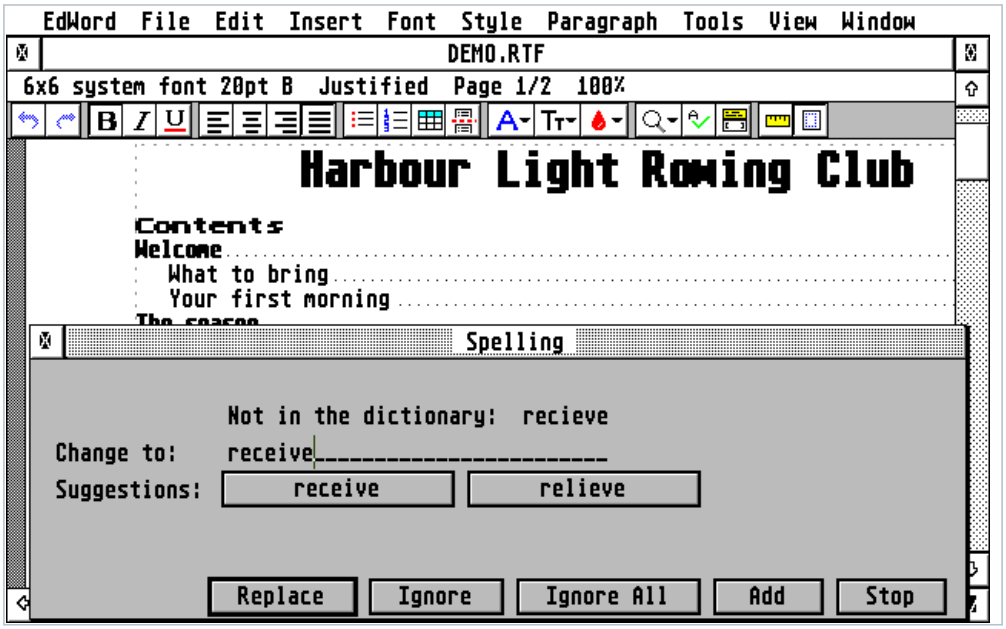

Checking spelling.


Spelling as you type

With **Spell As You Type** on, unknown words are underlined with a wavy line as you type.

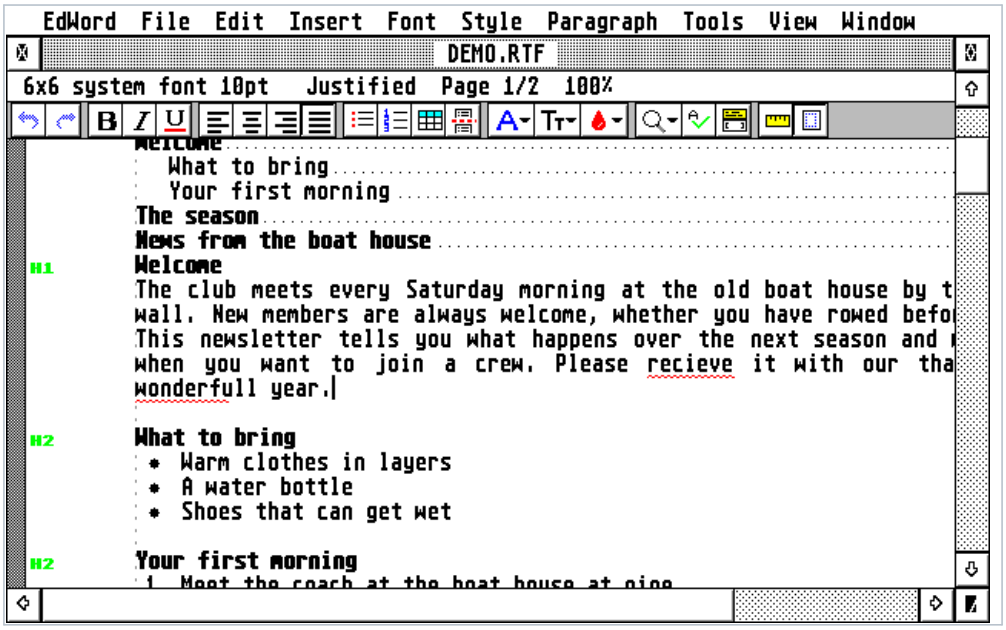

Unknown words underlined.

Hold the left mouse button on an underlined word for half a second: a menu offers the suggestions, **Ignore All** and **Add to dictionary**.

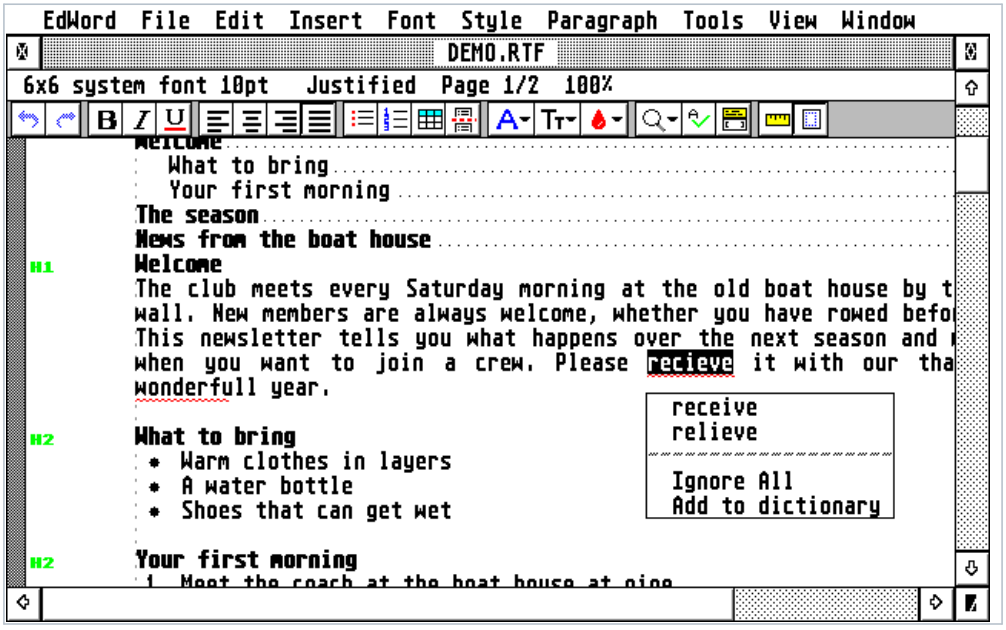

Suggestions for an underlined word.

Six languages


The **Dictionary** setting (**Preferences** > **More**) chooses English, German, Spanish, Italian, French or Czech for spelling (the dictionary file must be in EdWord's folder). The German checker accepts compound words made of two known words, the French and Italian ones elided forms such as *l'homme* and *dell'anno*, and suggestions use the language's accented letters.

User dictionaries

Words you add go to `USER.UDC`. **Load User Dictionary** and **New User Dictionary** let you keep up to four user dictionaries, for example one per subject; choose in the menu which one receives new words.

Thesaurus


Put the cursor on a word and choose **Thesaurus** (Shift+F7). The window lists the word's meanings (marked noun, verb, adjective or adverb) and, for the chosen meaning, its synonyms. Click a synonym to put it in the replacement box, double-click it to look that word up, then **Replace**. Forms such as "boats" or "rowing" are looked up under their base word. The thesaurus comes from Open English WordNet (licence CC BY 4.0).

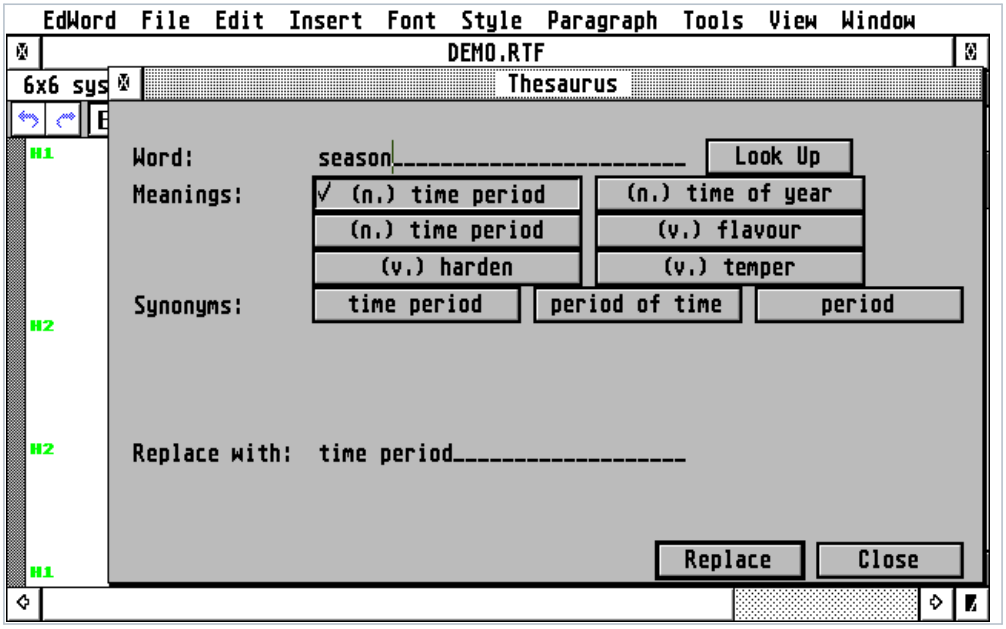

The thesaurus.

Document summary


Document Summary counts pages, words, characters (with and without spaces), paragraphs, lines, tables, pictures and drawings.

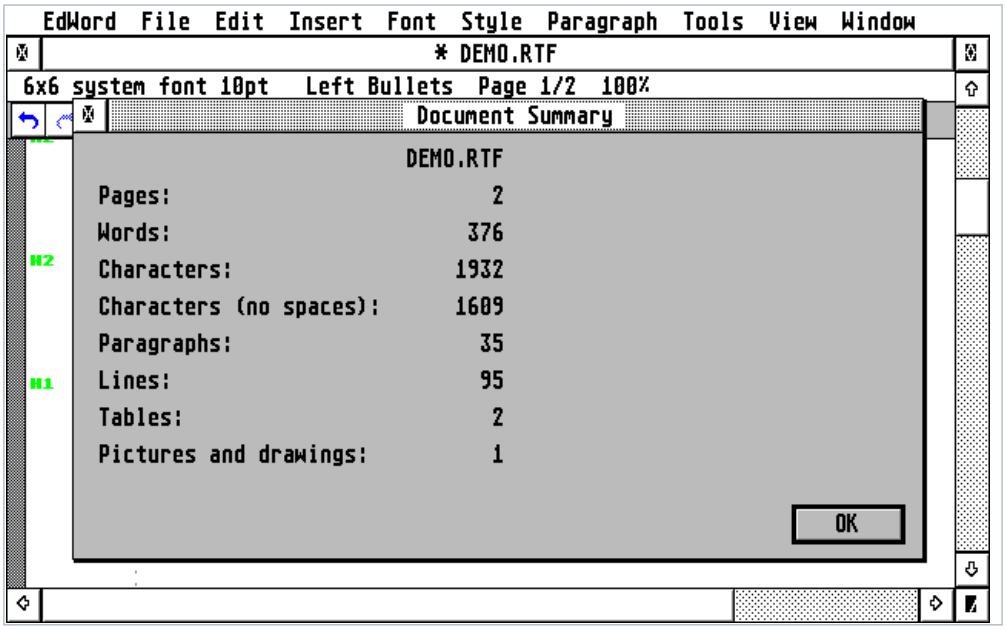


Document Summary.

Preferences

Preferences sets the language, the date format, the paper for new documents, the toolbar for new windows, text colours, the display (paper, dark, green or amber) and auto-save. **More** leads to the second page: page breaks, spelling as you type, the spelling dictionary, the PDF resolution and the documents folder. They are saved in `EDWORD.INF`.

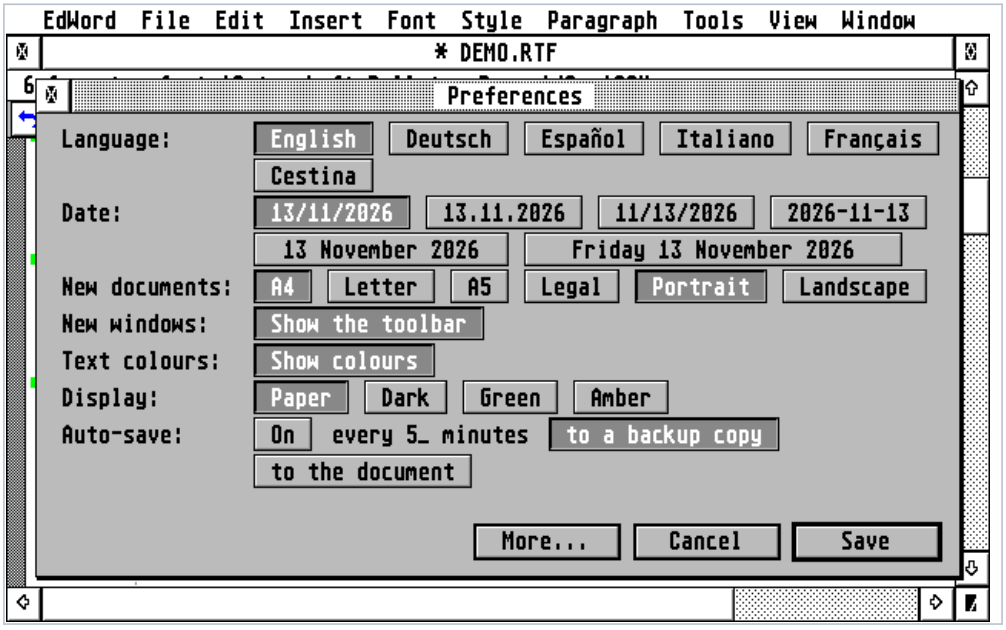


Preferences.

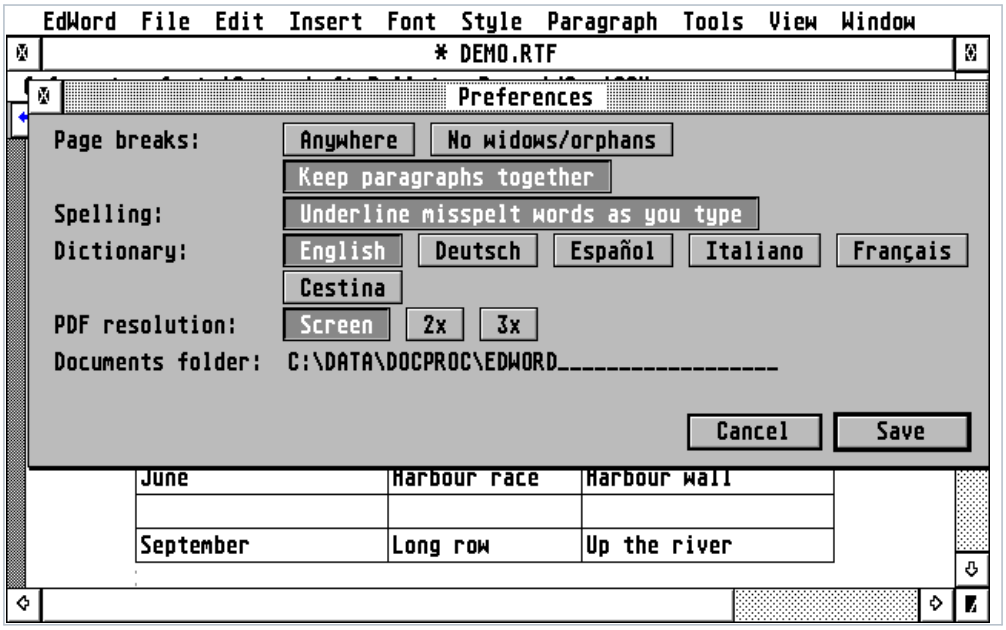


Preferences: *the second page.*

Windows

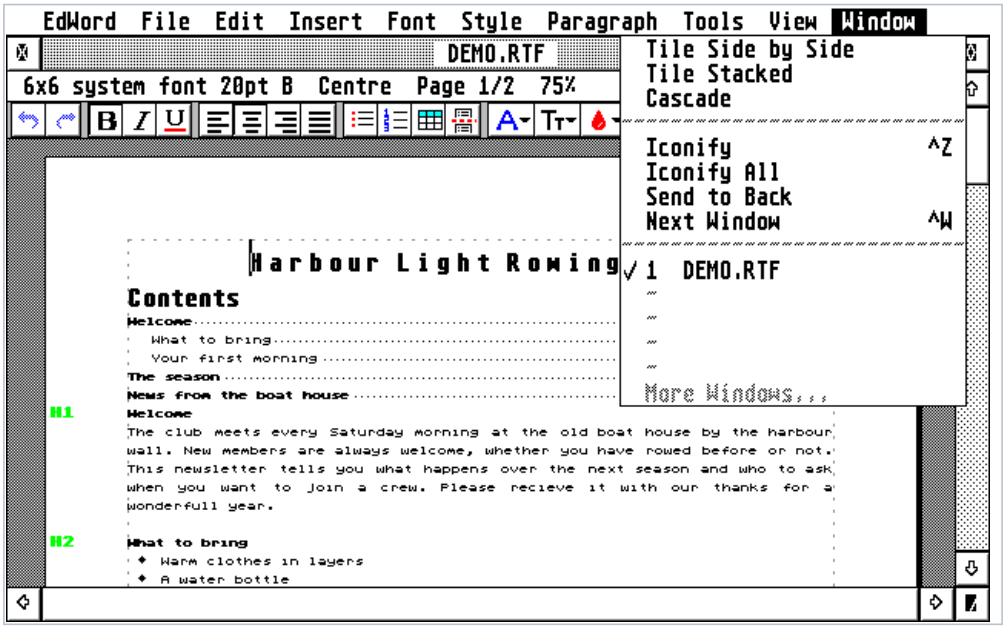


The **Window** *menu.*

Tile Side by Side and **Tile Stacked** share the screen between the open documents; **Cascade** stacks them. **Iconify** (Control+Z) shrinks a window to an icon (with AES 4.1 and later in the AES's own way), **Iconify All** does that to all, **Send to Back** sends a window behind the others and **Next Window** (Control+W) brings the next one forward. The list at the end of the menu brings any document to the front; when there are more documents than fit, **More Windows** lists the rest. Dialogs and gauges are windows too, so they can be moved; a document, dialog or tool window opens again where it was last closed.

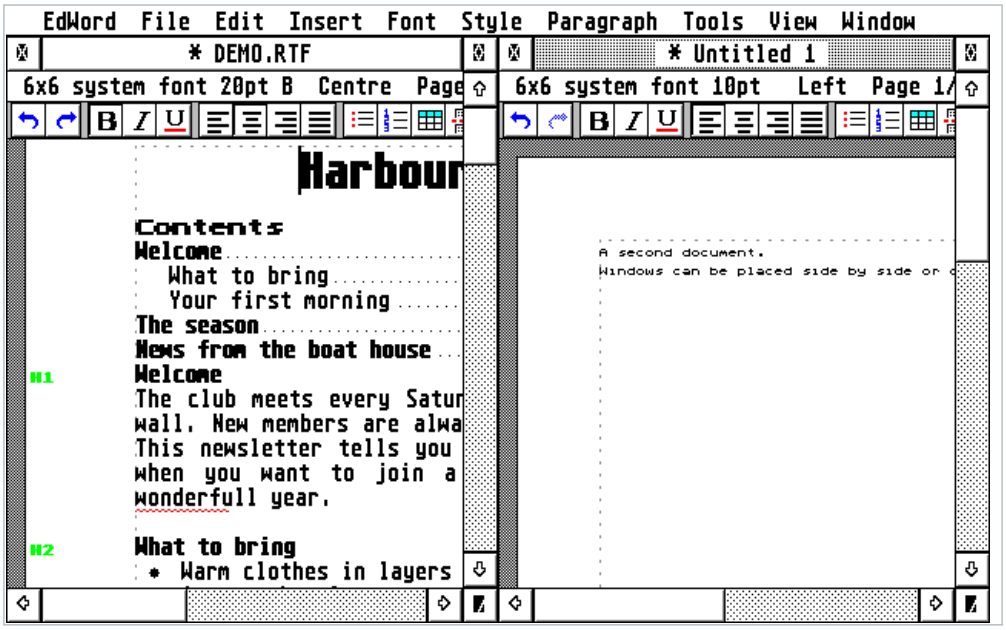

Tile Side by Side.

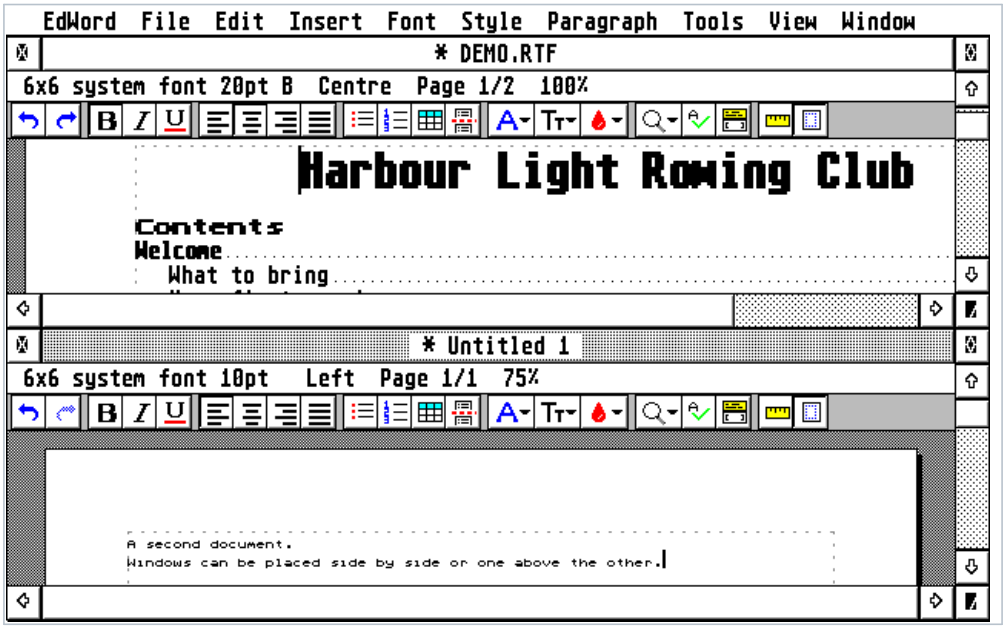

Tile Stacked.

Colours and screens

EdWord works on every screen from 640 pixels wide. More colours add these:

Screen	What it adds
Monochrome (2 colours)	everything works; pictures are dithered to black and white, text colours are not shown
4 colours (ST medium)	some text colours; the green display; pictures dithered to 4 colours
16 colours	the toolbar icons in colour; all eight text colours; charts in colour; the amber display; pictures dithered to 16 colours
256 colours	colour themes for the toolbars, the information line, rulers, codes and the desk; pictures dithered to 256 colours
High or true colour (15 to 32 bits)	pictures in their own colours; a colour theme for each document window


The dialogs, alerts, menus and window frames are drawn by the system in its own colours on every screen.

Testing EdWord

`EDWTEST.PRG` (in the `TEST` folder of the package) is EdWord with a test built in. Put it in the `EDWORD` folder and run it: in English, it chooses every menu command that can be used on a document, types and edits in the page view, the split view and quick edit, makes and changes a table, copies and pastes, saves an EdWord document, exports it in every format, closes everything and opens the files again, checking as it goes. Dialogs are left with their usual button and file selectors cancelled, and your preferences are not changed. It then quits.

What it did is in `EDTEST.LOG`, a line at a time: *pass* or *FAIL* for each check, the count at the end and *DONE* as the last line (if EdWord stopped on the way, the last line shows where). Its files go in the folder `EDTEST`. A `TEST.SCR` beside it replaces the test with your own script.

About EdWord

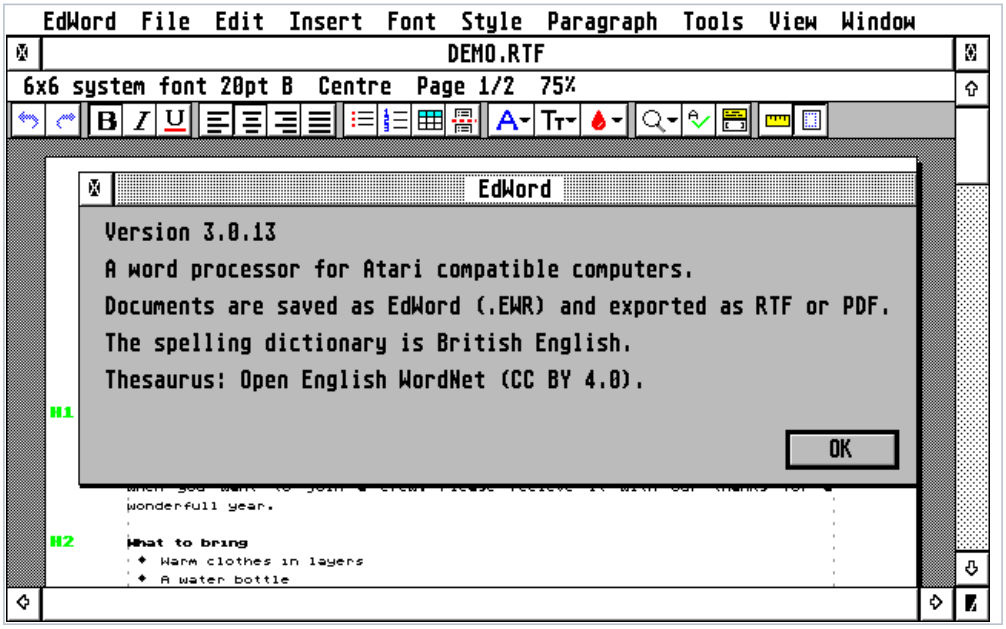

The About box.

EdWord > **About EdWord** shows the version. When EdWord is built from its sources, the version number and the sentence under it can be set on the command line: `make ED_VERSION=3.1 ED_ABOUT="Built for our club"`.

Keys

Key	Does
Control+N, O, S, U, Q	new, open, save, close, quit
Control+Shift+S	save as
Control+P, Control+Shift+P	print, print preview
Undo, Shift+Undo	undo, redo
Control+X, C, V, A	cut, copy, paste, select all
Control+F; Control+G or F3	find and replace, find next
Control+Up, Control+Down, Control+J	previous page, next page, go to page
Control+D	insert the date
Control+Return, Control+Shift+Return	page break, column break
Control+Shift+F	font selector
Control+B, I, Control+Shift+U	bold, italic, underline
Control+L, E, R, Control+Shift+J	left, centre, right, justify
F9, F10	bullet list, numbered list
Control+K, Shift+F7	spelling, thesaurus
F4, Control+Y, F6	page view, split view, **Quick Edit**
F7, F8, Shift+F8	zoom out, zoom in, fit page width
F2	repaginate
Control+T, Control+Shift+R	toolbar, rulers
Control+Z, Control+W	iconify, next window
Tab, Shift+Tab (in a table)	next cell, previous cell
Esc	close a tool window, let go of a picture

Limits

- 32 documents at once.
- 255 different paragraph formats, 48 tables and 32 pictures and drawings per document; 12 columns per table; 16 shapes per drawing.
- Up to 4 text columns per page.
- The document must fit in memory; with 1 MB that is roughly 100 pages of text.